


SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1905, by Munn & Co.]


Vol. XCII.—No. 3.
ESTABLISHED 1845.

NEW YORK, JANUARY 21, 1905.


[8 CENTS A COPY
\$3.00 A YEAR.]

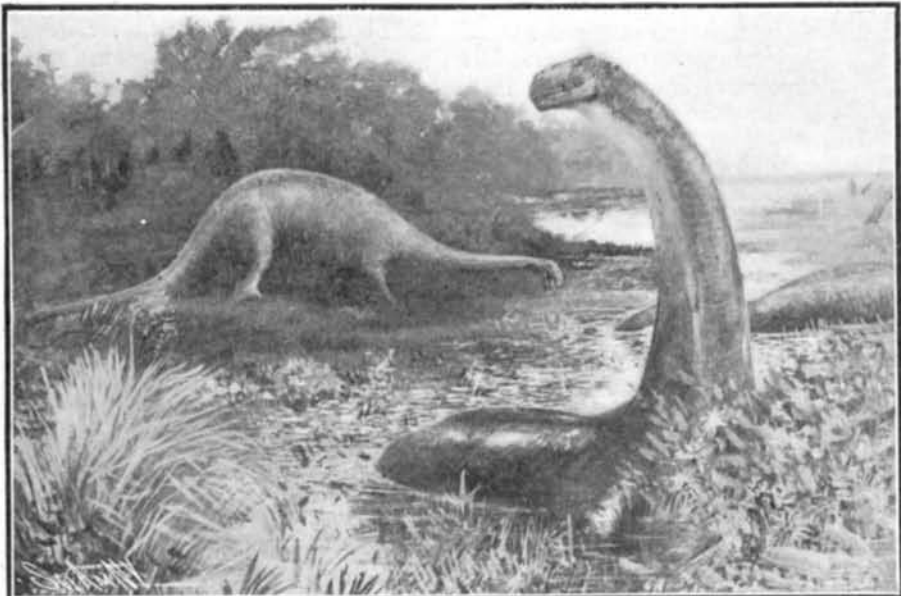


Drawing by Charles R. Knight. Brontosaurus as They Probably Appeared at a Period Estimated at Seven Million Years Ago.

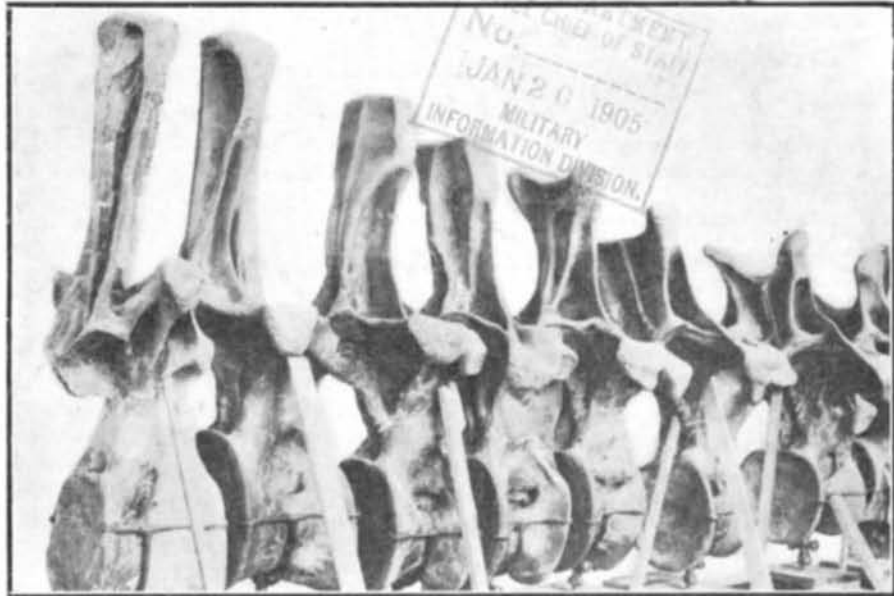


Part of the Vertebral Column. The Structural Similarity with the Modern T-shape is Apparent.

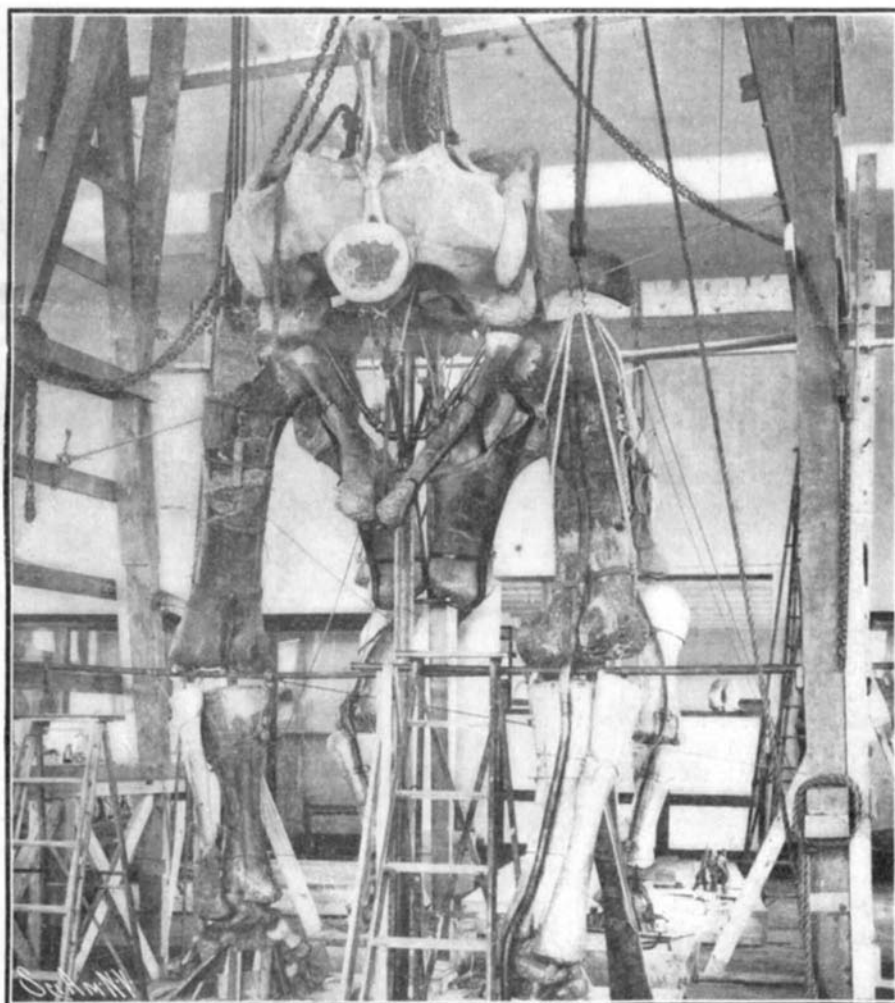

The Hind Legs. Height of the Reptile at the Hips, About 15½ Feet.

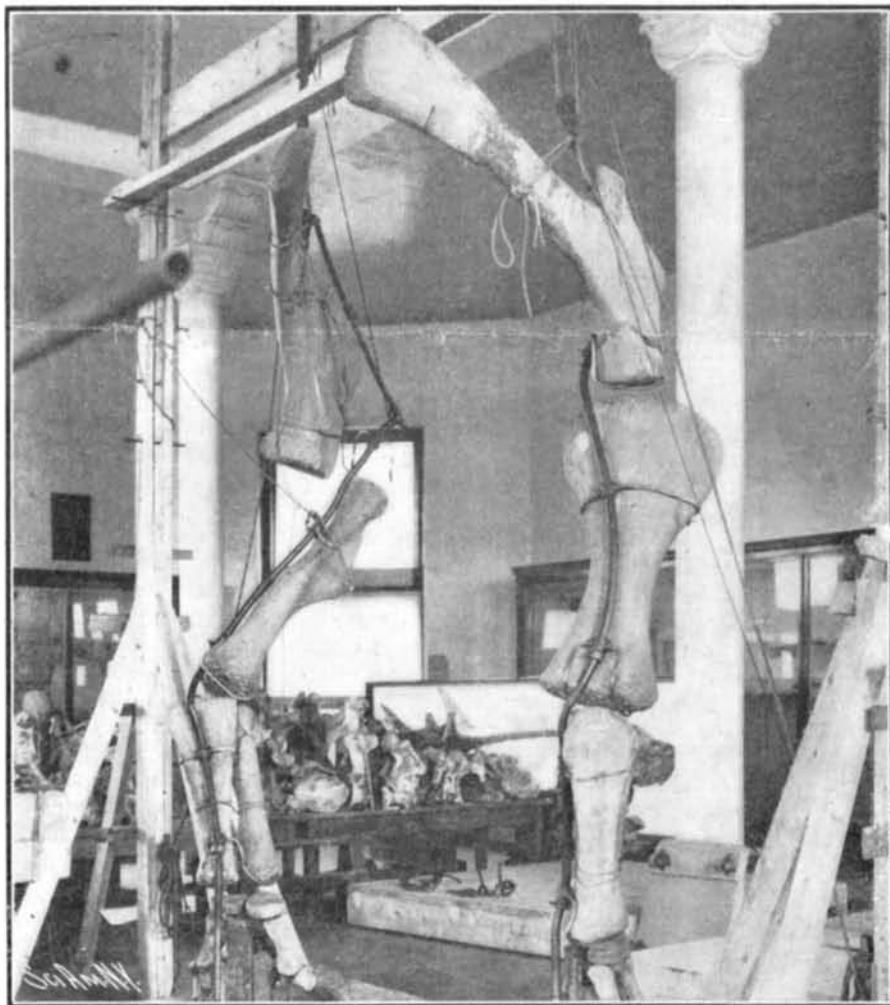

Fore Legs, Showing Method of Mounting.

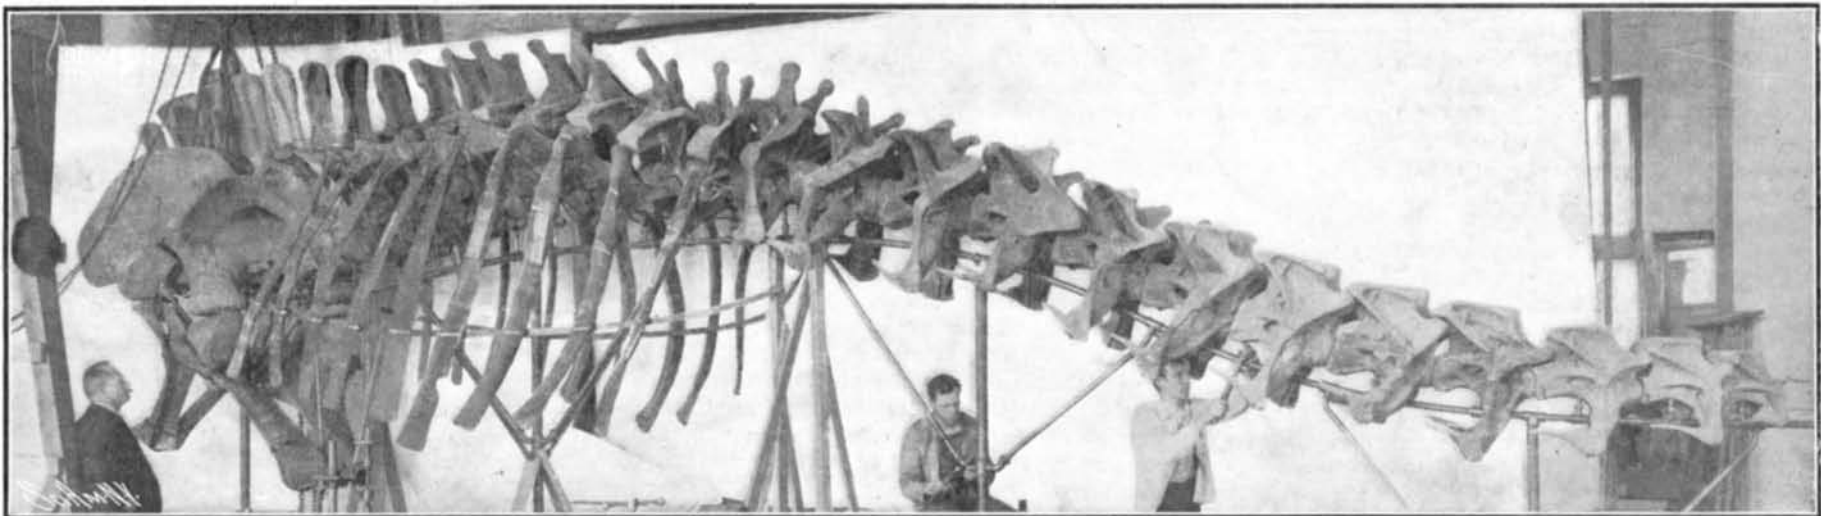

A Portion of the Brontosaurus Skeleton, from the Hips to the Head, Showing the Iron Work Used in the Reconstruction. The Total Length of the Animal is Estimated at 62 Feet

THE RESTORATION OF THE GIANT LIZARD, THE BRONTOSAUR, AT THE AMERICAN MUSEUM OF NATURAL HISTORY, NEW YORK.—[See page 42.]

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO., - - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

TERMS TO SUBSCRIBERS

One copy, one year for the United States, Canada, or Mexico \$3.00
 One copy, one year, to any foreign country, postage prepaid, £0 10s. 6d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (Established 1845) \$3.00 a year
 Scientific American Supplement (Established 1876) 3.00 "
 Scientific American Building Monthly (Established 1888) 2.50 "
 Scientific American Export Edition (Established 1878) 3.00 "
 The combined subscription rates and rates to foreign countries will be furnished upon application.
 Remit by postal or express money order, or by bank draft or check.
 MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, JANUARY 21, 1905.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are sharp, the articles short, and the facts authentic, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

SCHEDULE VERSUS SAFETY.

The greatest credit is due to the Interurban Company for the admirable manner in which they have operated the new Subway during the two months of its active service. Systems as large as this have usually grown from small beginnings, and developed gradually to the full magnitude of their traffic; but in this case, the turnstiles were opened and the full flood of a great city's traffic was allowed to flow into the Subway, as though the opening day were but one in a long series of years of successful operation. Not even the Interurban officials, however, will claim that the operation of the system is so perfect that no further improvements can be made; and, indeed, an incident occurred recently in the early hours of the morning which served to show that in one respect at least the security of the passengers can be very materially increased. We refer to a rear-end collision, which took place between two trains on the local tracks at the Worth Street station, and to the fact, which was brought out by this incident, that although the automatic stop is used on the express tracks, this most excellent device has not as yet been installed on the local tracks. The automatic stop, it will be remembered, is a small lever placed on the tracks, which is raised whenever the adjacent signal is at danger, and when in this raised position serves to shut off the current on a passing train, and set the emergency brakes. This stop is considered, and rightly so, to be an absolute preventive of rear-end collisions.

Now, the action of the stop in the case of a breakdown of any train, is to delay the whole service on that particular line back of the obstruction, every train being held with a clear stretch of track between itself and the train ahead. This, of course, means that the blocking of one train involves the instant blocking of a long stretch of trains behind it. In order to avoid such delay, the management decided not to install the stop on the local tracks; but to adopt a modified operation of the block signal system, under which, when the signals are against him, the motorman is permitted to proceed "under a slow bell" until he brings himself as near to the train ahead as to his judgment may appear to be advisable. By thus playing fast and loose, as it were, with the inexorable demands of the block-signal system, the following trains are kept moving much longer than they otherwise would be, before being brought up by the obstruction. This conduces, of course, to a closer observance of the time schedule; but it is done at a very evident sacrifice of those safeguards which the block-signal system is intended to throw around the passenger.

It is this practice of leaving to the judgment of the engineer as to how far and how fast he may proceed beyond a signal that is set against him, that is answerable for a large percentage of the accidents that are occurring on our steam railroads with such alarming frequency; and it cannot be denied that the adoption of the same method on the local tracks of the Subway has materially lessened the security of travel on that system. It is to be hoped that the officials, prompted by the recent collision, will see the wisdom of applying the automatic stop not merely to express tracks, but to every track on the road.

THE AMERICAN EXHIBIT OF FOREIGN AUTOMOBILES.

The fact that in this year's annual automobile show it has been necessary to find a separate hall in which to house the foreign exhibits, is striking evidence of the rapid growth of the domestic industry. In previous exhibitions there has been a hint of the separation that has taken place this year, in the fact that for the last two or three years foreign exhibitors have been grouped in a separate room at Madison Square Garden. The demand this year has been so great, that every foot of available space at Madison Square has

been required for the exhibition of domestic machines, with the result that, for the first time, the foreign makes are to be found in an entirely separate building. As it is, there is a sufficient number of first-class foreign machines and their accessories to entirely fill an exhibition hall which occupies one complete floor of the largest department store in New York city.

Our succeeding issue, which will be a special number, devoted to the annual Automobile Exhibition as illustrative of the development of the American industry, will include detailed illustrations of some of the leading foreign machines; and it will suffice in the present article, which is devoted to a general survey of the foreign exhibit, to mention some of the more important points of novelty that have been developed during the past twelve months. In the first place, testimony should be borne to the characteristic beauty of design and excellence of finish that distinguish every machine. Although, in general contour and proportions the cars conform to the standard of last year, there have been some modifications produced in the form of the bonnet and the curves and proportions of the body that have added not a little to their handsome appearance. There is a general tendency to abolish the rear door and substitute the side door, which is placed either in the body of the tonneau, or else is formed by an ingenious arrangement, either of a swiveling or a lifting front seat, which makes it possible to enter the automobile directly from the sidewalk, and avoid the old inconvenience of having to step into the street. A machine that attracted much favorable comment was a brougham intended for city use, in which the bonnet is dispensed with, and the motor is placed beneath the driver's seat, which is hinged at the forward end, and can be lifted for inspection of the engine. This arrangement permits a considerable shortening of the wheel base, and provides a brougham that is more easily maneuvered in a crowd of vehicles, particularly in moving to the sidewalk in front of a theater or crowded store. This is a step in the right direction, at least in such cases as are intended more particularly for city use. There has been a considerable development of the inclosed or partly inclosed automobile, of the type that has been so popular during the past season, and some very pleasing designs are exhibited.

We note a tendency to abandon the over-light metallic car bodies, and return to the more substantial wood. This, of course, has the disadvantage of increasing the weight of the machine—a fact that has been noted with some alarm by the French tire makers, one of whom has recently offered a prize for a machine having the lightest car body compatible with reasonable strength.

In the design and construction of the chassis, engines, and running gear, there is no striking novelty to record. The pressed-steel frame has become the standard type, although a few makers exhibit a frame built up of standard shapes. There is a general adoption of the protecting pan, curving across the frame beneath the engine and transmission gear—a device so obviously useful that it is surprising it should not have been incorporated long ago. It is a common practice to equip each engine with two separate methods of ignition, the high-tension magneto and the battery and coil. The former is preferred, and the batteries are held in reserve in case of a breakdown of the magneto. In this connection mention should be made of a magnetic clutch, exhibited on a Belgian car, in which magnets, incased in the flywheel, are energized by current from the magneto or from the batteries. The device has apparently given excellent results, and if so, we may look for its very general adoption. Another promising form of clutch carries a series of springs behind the leather casing, by means of which the power is transmitted so gradually, that the car can be started when the transmission is on the high speed. The performance of these two clutches will be watched with keen interest during the coming season.

Many minor improvements were noted in the direction of providing a more convenient access to the various levers for control of the engine, the transmission gear, and the brakes; the foot-brake levers, in particular, being made longer, and so placed as to be operated with more of a forward and less of a downward thrust than in the earlier machines. In tires, the most notable improvement is the introduction of a non-slipping variety, in which a leather sheath is vulcanized over the tire proper, this sheath carrying a leather strip the full width of the tread, on which are riveted a mass of flat steel plates or studs, which serve the double purpose of giving improved adhesion and at the same time protecting the rubber tires from wear and puncture. The exhibit, as a whole, is a demonstration of that excellent workmanship and general beauty of design which have enabled the foreign makers, in spite of the remarkable development of our own industry in this country, to import into the United States, as they did last year, over three million dollars' worth of machines.

A MONUMENTAL BUILDING.

In planning the truly magnificent station which is to take the place of the present Grand Central Station of the New York Central Railroad, the company have shown a full appreciation of the magnitude of the problem and of the inexorable necessity that is laid upon them of building not merely for to-day, but for the vast increase of travel of the far future. When the present structure was built, back in the seventies, it was the wonder of the day; and because of its magnitude, its great arch of glass and iron, its many parallel tracks, its long stretch of office buildings, and other features of greatness, the Grand Central Station was, for many years, an object of much civic pride in New York city. It was built with a strict eye to the future; nevertheless, but two decades had passed when the company began to realize that so rapid was the increase in traffic, that their great station was great no longer, and that before long they must begin to pull down and build on a far more generous scale. The question of enlargement was receiving serious consideration, when the enormous inconvenience, not to say danger, attending the running of steam-operated trains through the tunnel approach to the station became so acute, that legislative powers were sought to enable the company to dispense with steam locomotives altogether, and operate the terminal yard and the suburban traffic by electrical traction. The opportunity presented by this change of motive power enabled the company at the same time to greatly enlarge and entirely reconstruct the station yard and the terminal buildings.

The magnificent structure, of which we present illustrations on another page, is the outcome of a continuous study of the problem by the architects, Messrs. Warren & Wetmore, associated with Messrs. Reed & Stem, and by the engineering staff of the New York Central Company. Every possible arrangement of tracks and type of building was considered, and no less than two hundred different sets of plans are now on file in the architects' office, as evidence of the care with which the problem was studied. The present designs were adopted because they conform to certain important principles which were laid down as indispensable to the successful operation of a great terminal station such as this, chief among which were the following:

The station must be considered as a great gateway to the city and, therefore, must be simple and dignified in its architecture, and must provide the broadest possible facilities for the inflow and outflow of traffic. It was this consideration that condemned those plans which contemplated the erection above the station of a vast office building; for such a structure would have congregated several thousand people at the very point where it was desired to provide a broad unobstructed thoroughfare for incoming and outgoing passengers.

The progress of the passengers from the street to the cars and from the cars to the street, must take place as far as possible in two direct and entirely separated channels; the incoming and outgoing crowds never meeting or intermingling with those moving in the opposite direction.

In passing from the street to the cars, the passenger should take the steps incidental to departure in their natural consecutive order, with as little running to and fro as possible; the waiting room, the ticket office, the baggage room, the concourse, and the departing platform presenting themselves successively to him as he moves to his particular train. Similarly, the incoming passenger should find the incoming baggage room, the cab stand, and the means of exit to subway station or to street, presented to him in quick and logical succession.

The express and long-distance passengers, whose progress through the station either in departing or arriving is necessarily retarded by ticket purchasing and the checking of baggage, should be entirely separated from the suburban passengers, who almost invariably pass direct from the street to the car without any delay in the station.

Lastly, in view of the vast increase which must necessarily and rapidly take place in the future, the station must be built on a scale much larger than is absolutely needed by the present volume of travel; and this provision must extend not merely to the area devoted to passengers in waiting rooms, ticket lobbies, and concourse, but to the station yard itself, which must be extended in area to accommodate the larger number of trains that will be required.

Now, it must be admitted, after an impartial study of the plans of this great undertaking, that the above requirements appear to have been fully met and all the provision for the future made that can reasonably be asked.

Architecturally, the station building will present a massive and dignified appearance, worthy of what is probably the most important railroad terminal in America. The architecture of the building is throughout and without exception an expression of the plan; none of the decoration being used merely for architectural effect, but everything serving some useful, struc-

tural purpose. Thus the main piers under the great arched roof of the concourse, and at the intersection of the roof and its transept, are necessary to carry the load of the massive steel work of the roof. This is true even of the two massive piers that flank the main entrance on Forty-second Street, their great mass serving to take the horizontal thrust of the arches. The only possible exception is the pairs of columns between the arches of the Forty-second Street entrance; and these are placed there merely to accentuate the fact that this is the main approach. The proportions of the façade are truly monumental, the main arches being 33 feet in width by 60 feet in height, and the cornice being about 75 feet above the street level. The whole structure will be faced with gray granite, and with its great frontage of 300 feet on Forty-second Street and twice that distance on Vanderbilt Avenue, and with an open width of street of from 130 to 140 feet to afford a fitting point of view, it must long remain one of the most successful of the monumental buildings of New York city.

THE LIFE OF A BARREL.

BY GEORGE E. WALSH.

The introduction of improved machinery in its manufacture has made the American cooperage business the largest in the world. There are upward of 300,000,000 barrels and circular packages manufactured in this country annually, and the demand increases so that this output must be steadily broadened in order to keep pace with the growth of the business. The largest consumption of barrels is in the cement business, which approximately demands 35,000,000 a year for the trade, while flour comes next, with a demand for 22,500,000; fence staples, bolts, nuts, and nails require 18,000,000, and sugar 15,000,000. Roasted coffee, spices, crockery, and fruits and vegetables use up about 5,000,000 barrels a year each, while the glassware trade, baking powder companies, distilled liquor manufacturers, and candy, tobacco, and cheese packers are big users of barrels, averaging in each trade from 2,000,000 to 3,000,000 barrels. The consumption of barrels for molasses, oil, lard and pork is also enormous, while dry paint, glue, snuff, oatmeal, screws, castings, and general hardware articles annually increase the demand on the cooperage supply.

While the amount of expenditures for barrels can be closely estimated for a given year, it is not possible to say how many barrels are in actual use. The life of a barrel is put down at one year by the trade; but that is far from true. The great majority of barrels have as many lives as a cat. They begin as sugar or flour barrels, and are then sold to the farmer for shipping his produce to market. It may be they are returned to him several times, carrying potatoes or pickles to market in the first trip, and then cabbages or lettuce in the next, each cargo being lighter in weight than the previous one, owing to the weakened condition of the barrel. Finally, the barrel may serve out its life work as a garbage receptacle, and be burned in the end in some tenement home to keep out the winter's chill. Thus it may be said that a barrel serves a more useful career than almost any other manufactured article, and its life is much longer than a season.

The demand for barrels is steadily increasing because modern machinery has made it possible to make them for the trade cheaper than almost any other form of package. That it is the most convenient form of package has long been acknowledged. The ancient cooper's art was a skilled one, and the work of cutting out the staves and then assembling them required long practice and apprenticeship. To-day machinery performs in a fraction of the time what hand labor did so slowly and clumsily.

The modern veneer machines have been instrumental in reducing the cost of barrels. Hand labor is eliminated here to such an extent that the work of feeding the machines constitutes most of the requirements of the operators. The staves are cut to the required thickness by the machines, and then pressed into shape by hydraulic pressure until they are ready for the assembling machine.

A feature of barrel-making in this country is the grading of the circular packages so that all the lumber brought to the factories can be utilized. One class of barrels must be absolutely water-tight, without a flaw of any kind in their staves. Barrels made for the oil, whisky, and paint trade must not only be flawless, but they must have a resistance power equal to a lateral pressure of five hundred pounds. In order to secure this the staves must be put to a rigid test beforehand, and they must be cured so there will be no danger of shrinkage and damage when put into use. Lumber used for this work must be carefully selected, and it must be cured by nature's slow but sure process. Kiln-dried lumber would never do. The condition of kiln-dried wood is such that it would prove too brittle.

The choicest oak, hickory, ash, or other hard wood must be selected for barrels used for such purposes, and their cost is consequently in proportion to the extra labor and cost of the raw product. Out of every dozen trees in an ordinary woods only four or five will be

found to pass the most rigid examination and tests.

The second grade of barrels comprises those which have to endure a great lateral strain, but which do not have to be water-tight. To this class belong the sugar barrels, and all those used for packing hardware. The staves must be made of hard wood, but they only require strength and a power to resist three or four hundred pounds lateral pressure. It is possible to use for these barrels most of the lumber rejected for the first class of barrels. There must not be knot holes in the barrels, however, for tightness to some extent is essential. While the sugar and flour barrels have paper lining inside of them, they will spill more or less of the contents if holes and cracks of an unusual size are left in them.

The third grade of barrels includes those used in the hardware trade and for packing tobacco, spices, and coffees. The weight of these articles is no less than sugar or flour, but their sides need not be so tight. The barrels and kegs for the hardware trade must be stout, but lumber can be used that is somewhat defective. Knots are not necessarily a bar to the use of staves. Some of the rough lumber used up in this way is practically of little or no use for the manufacture of any other kinds of circular packages. The cost of the raw material being smaller, the barrels can be sold to the trade from fifty to sixty per cent less than those made for sugar, molasses, oil, whisky, and paints.

The question of hoops for these commercial barrels is fully as important as the staves. The use of wire and flat iron hoops has become quite universal, but where wooden hoops can be used as well, they always receive the preference. The most satisfactory method is to use wooden hoops, reinforced by iron or wire ones. A great many of the barrels used in the trade are thus held together. There is a uniformity of strength existing between staves and hoops which must be carefully computed in the manufacture of barrels for the different trades. To make hoops that would break at a straining point of two hundred pounds for barrels that were built of staves guaranteed to withstand a pressure of five hundred pounds would be a waste of good material. If anything, the hoops must have a resistance more than equal to that of the staves. The hoops are consequently the most important part of the barrel. Stout hoops will hold a barrel together even when the staves are weak, and it is possible to hoop a barrel of 200 pounds resistance so that it will resist a pressure for a time of 500 pounds. The breaking power of either the wooden or wire hoops is carefully computed for each class of barrels, and when properly made and applied they will insure a long life to the circular packages. The life of the barrel is estimated by the life of the hoops, and to prolong it beyond that period new hoops must be supplied.

DETERMINING A SHIP'S BEARING BY WIRELESS TELEGRAPHY.

A Boston inventor has devised a means for determining the bearings of navigable vessels under all conditions of weather, the object being to provide improved indicating devices for use with a ship's compass and the usual sailing-charts, whereby the bearings of known objects at a distance from the ship may be positively determined at times when owing to fog or storm the landmarks may be invisible.

The invention is based upon the scientific fact that "Hertzian-wave" impulses or signals may be conveyed over long distances without connecting-wires. This principle is utilized to determine the position of the ship with relation to known landmarks, thus rendering navigation safer and avoiding delays in the movement of vessels caused by foggy or stormy weather when the usual sight observations cannot be taken.

The apparatus, carried on the ship, is applied to or connected with the binnacle, which incloses the ship's compass; and it consists, primarily, of a receiving instrument electrically connected with an upright conductor so shielded that it can receive only the wave, impulse, or signal (coming from a transmitting station on shore or from another ship or light-ship) through a lateral opening or slot when such exposure is in proper range radially with said ship or shore station. The conductor is surrounded by a rotatable shield, cap, or tube slotted vertically to admit the wave or impulse from a given station at such time only, in its rotation, as the slot or opening is approximately between said station and the inclosed conductor. With this apparatus or its equivalent when used on shipboard a rotatable pointer is employed extending over and close to the compass, always in the same radial vertical plane as the slot or exposure, to indicate on the face of the compass the bearing of the station from which emanates the signal or impulse reaching the receiving instrument through such slot or exposure.

With this system of taking bearings each lighthouse and prominent landmark will have a distinctive name or number by which it is known and designated on sailing-charts, and each will be provided with a transmitting instrument adapted to continually repeat its

name or number or to automatically transmit such impulse, wave, or signal as shall make the identity of the station certain. Then when a ship appears off the coast provided with the receiver and compass attachments, the elevated conductor receives through the slot of its rotating and intermittently-acting shield the impulse sent seaward from the transmitting stations, and the navigator notes at once on his chart the bearing of the station as denoted on his compass-dial by the indicating pointer. From another shore-station he receives a different signal, and by the cross-bearings thus secured he obtains his reckoning, showing exactly where on the chart his ship should be. A transmitting instrument on the ship will at such times be able to communicate with the shore-station, thus making its presence and its exact location known.

SCIENCE NOTES.

A telegram has been received at the Harvard College Observatory from Prof. W. W. Campbell at Lick Observatory stating that a sixth satellite of Jupiter, suspected by Perrine in December, was discovered by him January 4, 1905. The position with respect to Jupiter from previous plates taken in January, is as follows: Position angle 269 deg., distance 45. The distance is decreasing 45 sec. daily. The apparent motion is retrograde and the magnitude 14. Derived from observations with the Crossly reflector on December 3, 8, 9, 10, and January 2, 3, 4.

A clock which will run for two thousand years has been invented by Richard Strutt, son of Lord Rayleigh. The motive power is a small piece of gold-leaf which is electrified by means of a very small quantity of radium salt. It bends away from the metal substance and keeps moving under this influence until it touches the side of the containing vessel. At the moment of contact it loses its electrical charge and then springs back and is again electrified, and the process repeated. Sir William Ramsay considers that this may be made into a very reliable time-piece at an expense of about \$1,000.

President Roosevelt has become the honorary president of a committee representing the United States, which is to be a portion of an international organization, including the heads of all of the Powers of Europe, to make excavations at Herculaneum, which, together with Pompeii, was destroyed by an eruption of Vesuvius in the year 79 A. D. Prof. Waldstein has secured the consent of the King of Italy to act as the head of the international committee. King Edward will be at the head of the committee in England, Emperor William in Germany, President Loubet in France, and King Oscar in Sweden. The international committee will have headquarters in Rome, over which the King of Italy will preside. Representatives of every nation will be at Herculaneum, and, once started, the work will be pushed rapidly.


E. Demoussy has made a series of experiments to show the growth of plants in an atmosphere charged with carbon dioxide gas. In this case the plants reach an increased development over the plants growing in ordinary air. He used two glass boxes each of over one cubic yard capacity and containing a number of pots. The first was not entirely closed and was used for the plants growing in ordinary air. The air supply was sufficiently renewed to give the average conditions, and a number of tests gave the normal amount of carbonic acid, or 3-10,000ths. In the second box a certain amount of carbonic acid gas was introduced each day so that the proportion reached 18-10,000ths. In the evening this became less, but never fell below 12-10,000ths, so an average of 15 could be admitted, this being five times the amount contained in ordinary air. During the day the plants were protected from the sun's rays by cloth covers, and at night the boxes were opened so that they were well aired. For the experiments he chose four sprouts as nearly alike as possible, placing them in ordinary flower-pots in garden earth, one pair in each box. The observations were made from the end of May to the end of July, at which time the plants were cut and weighed. The following results show the increase in growth due to the carbonic acid. The weights are those of all the part of the plant lying above ground. At the beginning the weights were very small, as the plants had just sprouted; only the geranium, mint, and fuchsia came from buds. The first figure gives the weight in ordinary air and the second in the air charged with gas. Coleus, 34 grammes; 50 grammes. Lettuce, 21; 36. Geranium, 45; 118. Castor, 26; 45. Mint, 28; 36. Red tobacco, 30; 54. White tobacco, 51; 101. Poppy, 21; 30. Fuchsia, 30; 29. All but one, the fuchsia, show a great increase, with an average of 60 per cent. The appearance of the plants is the same in both cases, but the dimensions are somewhat greater in the latter case. For many of the plants the flowering is more rapid and abundant in the charged air. The fuchsia alone does not show any difference, but this may be due to the fact that the plants were but little developed in either case, as the conditions of high temperature and moisture were probably unfavorable for its growth.

THE NEW GRAND CENTRAL STATION, NEW YORK.

In the editorial columns of this issue will be found a discussion of the fundamental principles laid down by the architects of the new Grand Central Station, for their guidance in determining both the internal arrangements and the general architectural appearance of this great structure. The station building proper, together with the general offices of the company and

ing determined in every case by the structural engineering necessities of the station. The southerly façade will stretch for 300 feet on Forty-second Street, and the westerly façade will reach for 680 feet on Vanderbilt Avenue. The building will extend 625 feet on Forty-fifth Street, 400 feet on Lexington Avenue, 275 feet on Forty-fourth Street, and 260 feet on Depew Place. The southerly half of the building incloses the


height. On entering, the passenger will find himself in a vast ticket lobby, 90 feet in width by 300 feet in length. In the center of this building will be a long, oval structure, containing the ticket offices. To the right of this, and forming part of the main lobby, will be the outgoing baggage room. On the opposite side of the lobby the passengers will leave the ticket lobby through three main arches, corresponding to the en-

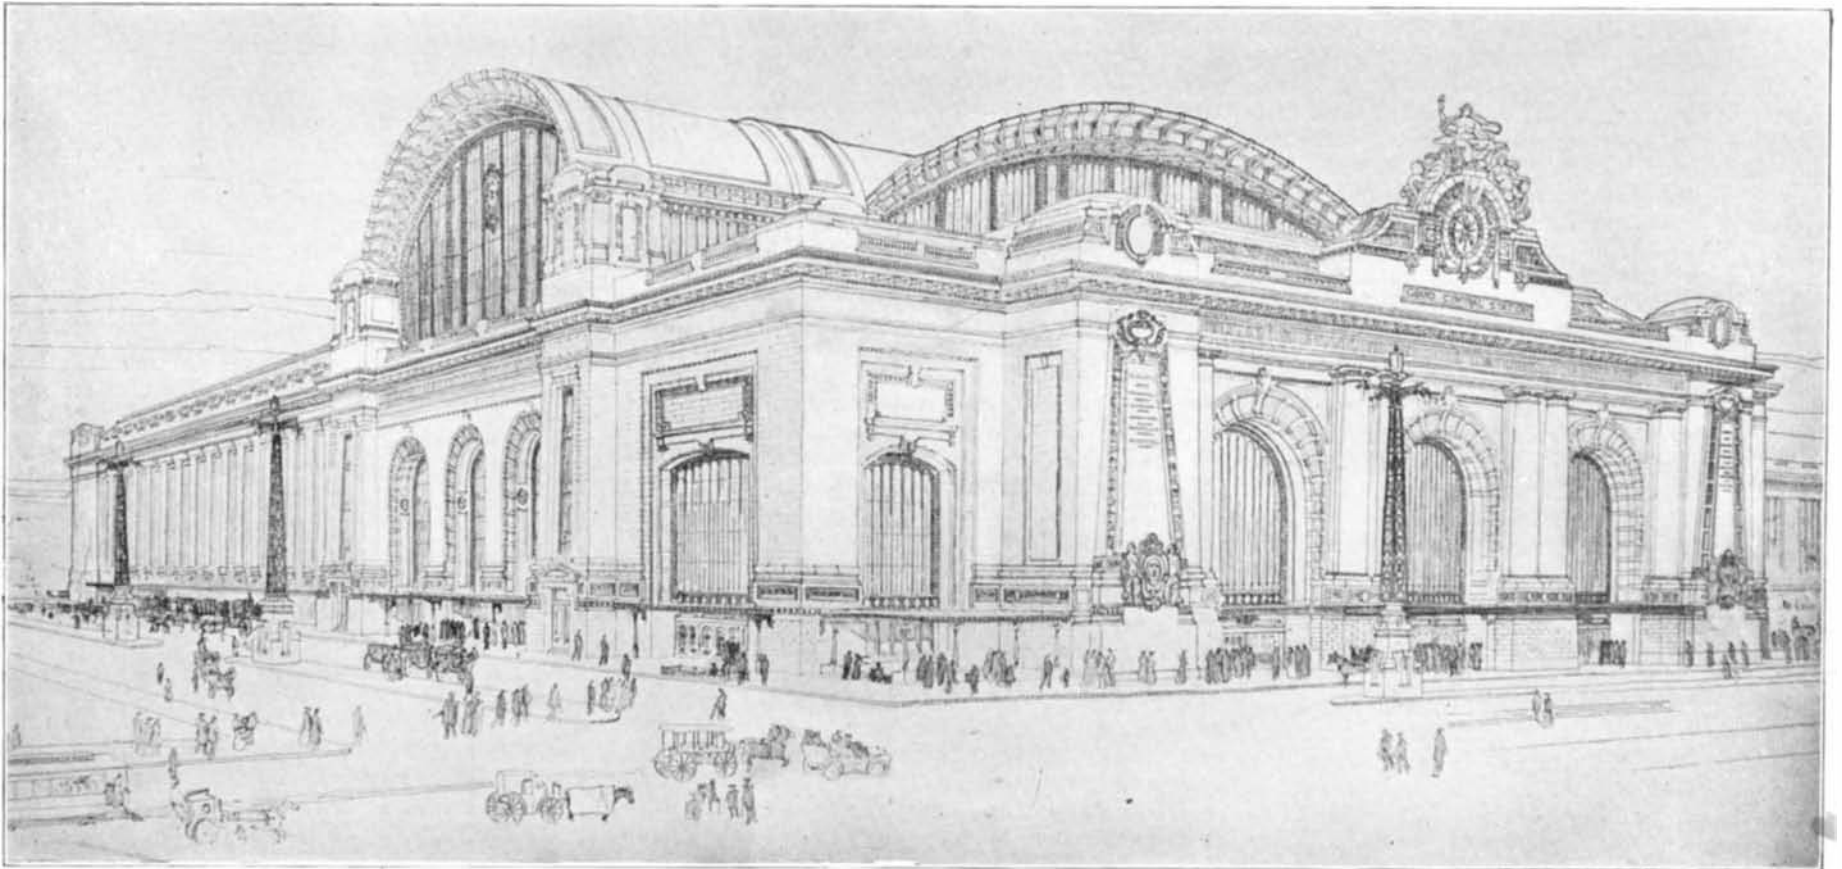

Frontage on 42d Street, 300 feet; on Vanderbilt Avenue, 680 feet. Height to cornice, 75 feet.

The New Station as it Will Appear from the Corner of Forty-Second Street and Vanderbilt Avenue.

Warren & Wetmore and
Reed & Stem, Architects.

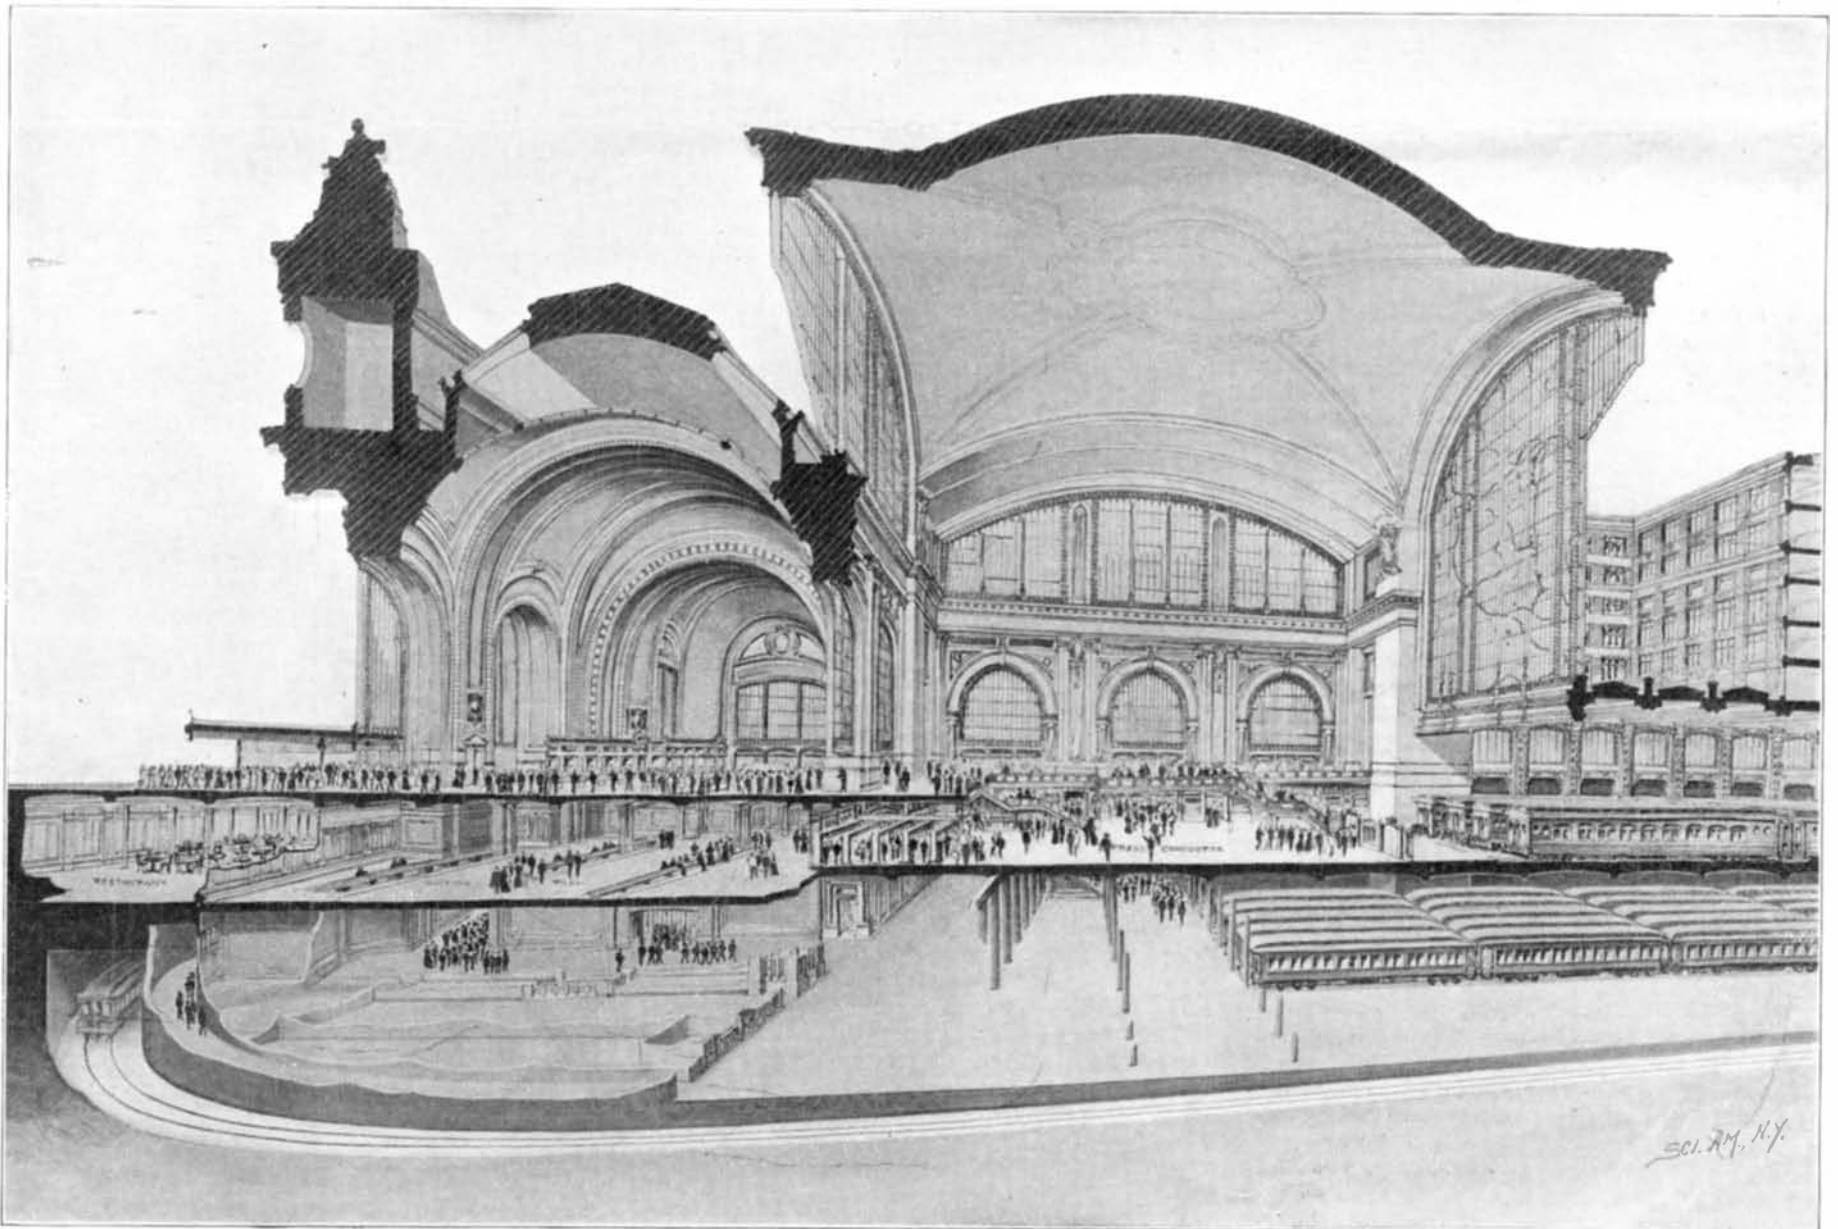

Restaurant.
Suburban Loop.

Ticket Lobby, 90 x 300 feet.
Waiting Rooms.

Grand Concourse, 160 x 470 feet, 150 feet high.
Suburban Concourse.

Express Tracks.
Suburban Tracks.

LONGITUDINAL SECTION THROUGH THE NEW GRAND CENTRAL STATION, NEW YORK, SHOWING THE TWO TIERS OF TRACKS.

the post office and express buildings, will cover the blocks lying between Vanderbilt and Lexington Avenues from Forty-fifth to Forty-third Street, inclusive, and the block fronting on Forty-second Street between Vanderbilt Avenue and Depew Place. The main architectural features are governed strictly by the ground plan, the dominant architectural elements be-

station proper, this portion extending as far north as the northerly side of the great arched roof, seen in the perspective view. The northerly part of the building is given up to the offices of the company.

The imposing main entrance to the station on Forty-second Street is composed architecturally of three massive arches, each 33 feet wide and 60 feet in

trance arches, and enter a broad gallery, which runs around three sides of the grand concourse. The ticket lobby and this gallery, it should be understood, are at street level. From the gallery, passengers will descend by four broad staircases, each 25 feet in width, to the floor of the grand concourse, which, by the way,

(Continued on page 46.)

A CHICKEN-FEEDING MACHINE.

BY W. FRANK M'CLURE.

Fattening fowls for the market by means of machinery, on first thought to most people seems ridiculous, hardly more so, however, than the hatching of chickens by means of an incubator a few years ago. The incubator has come to stay, and the chicken feeder, although an innovation, has found a place in some of the largest poultry yards. Modern genius in recent years has affected the poultry farm just as decidedly as it has the apiary or the stock farm, and its problems have offered a wide field for scientific study.

It is claimed that chickens fattened by machinery comprise sweeter and tenderer meat than those fattened in the ordinary way. Fowls are fed in this manner for two or three weeks prior to killing, and in that time increase in weight from two to three pounds. The chickens are not allowed exercise in this time, and are allowed no other food than that which is received from the machine. The feeding is done twice a day, and one man can feed 300 chickens in a day. It is a patent liquid food that is fed in this manner, the ingredients of which, of course, are known only to the maker.

The feeding machine is nicely illustrated in the accompanying photograph. The food is forced through a tube by means of a suction pump, which in turn is operated by a foot pedal. The tube, which is about ten inches in length, reaches through the chicken's mouth into its crop. In the photograph this tube is shown on the outside of the fowl's neck, reaching to about the same point as when inserted in the mouth. When the crop is full the flow of liquid food stops instantly, and the chicken is not injured in the least. This feeding by machinery is done chiefly in the preparation of roasters for the market and for finishing the fattening of broilers.

Notable progress has also been made among poultry raisers in the increased production of eggs. It is claimed to-day that it is within the power of the poultry owner to make his hens lay an average three years' crop in two years, and that even molting is controlled at the will of the owner. This is an important discovery in this day, when the demand for eggs is so enormous and the price so high. In the last annual report of the Secretary of Agriculture, a statement is made which gives an idea of the size of the annual consumption of eggs in this country. This report states that the hens of the United States lay 1,666,000,000 dozens of eggs a year, the value of which in one month is enough to pay the interest of the entire national debt for one year. There is little question that the scientific study that has been given the subject of poultry raising in recent years has added materially to this annual egg production over what it otherwise would have been. Proper housing, for example, has come to be recognized as an absolute essential. Also, as pure air is required for the healthy human being, so also the well-bred fowl to-day is given plenty of fresh air, while at the same time drafts are avoided.


It is not unusual nowadays to see numerous small chicken houses scattered over a large field where the poultry business is carried on upon an extensive scale. This arrangement, of course, admits of the various flocks being housed separately. Artificial heat is seldom resorted to in heating these houses, except in extreme cold weather. With all surroundings conducive, it is not unusual for one hen to lay sixteen dozen eggs in one year, and even better records than this are often made. Few poultrymen, however, attain such records with their flocks unless they have made a study of the numerous scientific methods of caring for them.

A new application of wireless telegraphy has been introduced by two English inventors. The device is purely for entertaining purposes, consisting of the operation of musical boxes placed at different points from one common center. There is a receptacle in which the coin is placed, and immediately a musical box placed at a distance, such as in another room, commences to play.

NEW CŒLOSTAT AND HORIZONTAL TELESCOPE OF THE ASTROPHYSICAL OBSERVATORY OF THE SMITHSONIAN INSTITUTION.

A novel form of cœlostæt has been designed by Mr. S. P. Langley, of the Smithsonian Institution, for the study of the absorption of the solar envelope and for measuring the energy of sun-spot spectra. Mr. C. G. Abbot describes this instrument as follows in the Smithsonian Miscellaneous Publications:

The beam is reflected due south from a rotating mirror and thence due north from a second mirror

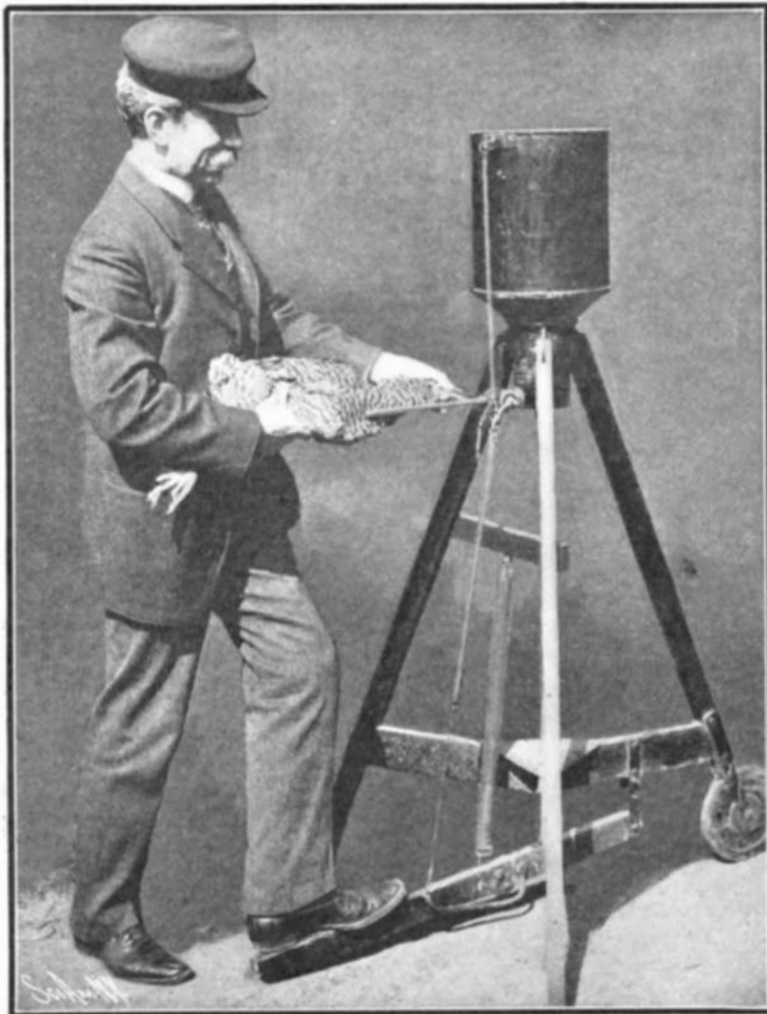**A CHICKEN-FEEDING MACHINE.**

over the top of the first. The beam from the first mirror shoots upward at an angle with the vertical equal to the sum of the angles of latitude and declination; and for the sun at Washington this angle is about 62 deg. at summer solstice and 16 deg. at winter solstice. Therefore to give a horizontal northerly directed beam the second mirror is to be inclined forward 14 deg. at the former period and 37 deg. at the latter.

In this form of cœlostæt the moving mirror is never used in very different positions, so that owing to the consequent probable constancy of figure in the mirror it seems to be well suited to long exposures in stellar photography.


At noon of the equinoxes the second mirror if exactly south of the first would cut off the beam, and at summer solstice it must be further south than in winter to reflect the beam clear over the first mirror. Accordingly the second mirror is provided with a carriage and two pairs of tracks at right angles like the slide rest of a lathe, so that the mirror may be displaced to the west a little before noon when the sun is in its southern declinations, and can be shifted back to the east a little after noon. The north and

south track is for the purpose of shifting the second mirror for different declinations of the sun, the mirror being at the south end of the track at the summer solstice.

As it has been thought that this solution of the difficulties attending the use of the cœlostæt will prove of interest and value to astronomers, a large instrument of this type was ordered from the J. A. Brashear Company and sent for exhibition to the recently-closed Louisiana Purchase Exposition. The accompanying engraving is reproduced from a photograph of this cœlostæt as now being tested at the Astrophysical Observatory, in connection with the long-focus mirror above mentioned. There is also shown in the illustration a portion of the "churned" tube of the horizontal telescope, of which more will be said later. The cœlostæt carries a thirty-inch and a twenty-five-inch mirror, the former turned by a polar axis driven at the rate of one complete rotation in forty-eight hours, the latter mounted on a carriage with traverse motions at right angles like the slide rest of a lathe. The cell of the second mirror is carried by trunnions in a fork, itself capable of turning about a horizontal north and south axis, and by these two motions of rotation, with their fine adjustments, the beam may be sent in any direction whatever, though most favorably in a nearly northerly one. In actual use the reflected beam is depressed about 6 deg. from the horizontal to feed the long-focus mirror, which is 55 feet north and about 3½ feet below the center of the first mirror of the cœlostæt, directly under which the beam passes toward a focus on the third pier, some 85 feet further south. To provide for this depression of the beam from the horizontal, the north and south, or declination, track of the cœlostæt is inclined upward at a corresponding angle, so that the reflected beam may always clear the first mirror. The length of travel of the lower base of the second mirror on this north and south track is five feet and the lower base itself has an east and west track six feet long on which the upper casting is moved to and fro to allow for avoiding the shading of the main cœlostæt mirror by the cell of the twenty-five-inch mirror between 11 o'clock and 1 o'clock near the times of the equinoxes.

Early experiments on an artificial star with the long-focus mirror, before the completion of the cœlostæt or the installation of a tube, showed conclusively that the "boiling" caused by irregularities of the atmosphere over the grass-grown soil between the mirror and its focus was far too great to permit anything like satisfactory definition on the solar image, and therefore the novel device of a tube with provision for stirring the air by means of a blast was ordered. It consists of a main horizontal tube 24 inches in internal diameter with diaphragms at five-foot intervals, and with an inclined flared tube uniting with the main tube at the north end close in front of the concave mirror. At intervals of about five feet, five-inch ducts lead to air-mains 14 inches in diameter, which in turn at length unite in two twenty-inch mains leading to the intake and blast respectively of a twenty-nine-inch fan blower with direct-connected 2½-horsepower electric motor. It is so arranged that the openings in the telescope tube communicate with the blast and suction of the blower alternately, so that the air within the tube is repeatedly carried through the system and churned over and over. Thus the path of the beam from the cœlostæt to the focus of the mirror is thoroughly stirred, but nothing has been done as yet to introduce stirring between the cœlostæt and the sun. It is possible that an attempt will be made later to stir the path of the beam in the eighty feet immediately above the cœlostæt, if it is found impossible to get good enough definition with the present arrangements.

It should be recalled that the conditions required for bolometric work are quite different from those suited to direct eye vision or to photography. Bolometric studies require unchanging transparency of the air, else difference in the galvanometer deflection may be due to alterations in transparency of

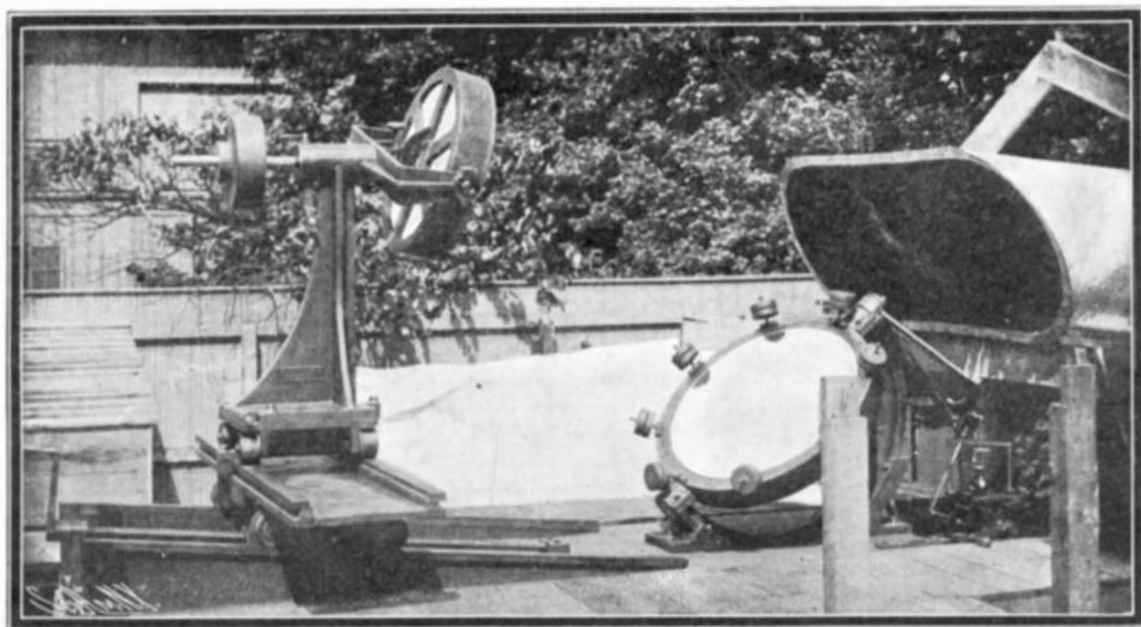**THE TWO-MIRROR CŒLOSTAT OF THE SMITHSONIAN ASTROPHYSICAL OBSERVATORY.**

the intervening medium and not to the properties of the source of light. Thus those times when thin cirrus clouds, fog, or smoke cover the sun, which are well known by solar observers to be the times when "boiling" is apt to be diminished, and which are the most favorable opportunities for visual and photographic observations, are quite unsuitable for bolometric work. Indeed, the best time for this is somewhat after noon on those clear October days when "boiling" is apt to be at a maximum, but cloudiness at a minimum, and it is probable that the definition obtained in such conditions will never be the best.

Trials made thus far have demonstrated the great value of the stirring apparatus, not only to diminish "boiling," but to preserve a constant focal length and tolerable definition. "Boiling" is still of course noticeable, because the long reach of air above the celostat is not stirred, but the image is far better than could be obtained with the earlier appliances, and owing to the massive piers and to the simplicity of driving mechanism, it is less subject to jars and wandering.

THE BRONTOSAUR. HOW A GIANT PREHISTORIC ANIMAL WAS DISCOVERED, TRANSPORTED AND RESTORED.

In 1897 Mr. Walter Granger, of the expedition sent out in that year by the American Museum of Natural History of New York, found in the southeastern part of central Wyoming, not far from the Medicine Bow River, the first fruits of the greatest collection of the fossilized remains of extinct reptiles that has ever been discovered in any one locality. Previous prospectors had taken fossils from the region, but had abandoned it for other fields, so that Mr. Granger really rediscovered it. It will be remembered, from various accounts published since then, that weathered fragments of dinosaur bones were so common at this place that they were taken for boulders of peculiar shape, and that a couple of Mexican sheep herders had used these fossils for the foundations of their hut. This Bone Cabin Quarry, as it came to be called, was about ten miles south of the famous Como Bluffs, from which a considerable number of fossilized skeletons had previously been taken. The finest specimen among these is Prof. Marsh's *Brontosaurus excelsus*, now one of the treasures of the Yale Museum.

When fossil bones of one kind are found in different places within a reasonable distance of one another, they usually occur in one stratum, which has cropped out at different points. This is true of the remains found at the Como Bluffs and at the Bone Cabin Quarry, the bone layers there exposed being of the same age, and originally an unbroken level stratum which may be designated as "the dinosaur beds." When the contiguous Laramie Mountains and the Freeze-Out Hills were formed by the shrinking of the earth's crust, this stratum was correspondingly warped and wrinkled into numbers of great folds or rock waves. Surface erosion of wind and water has been responsible for the subsequent removal of great portions of the crests and upfolds or "anticlines" of these waves, thus exposing the edges and allowing the weathering out of the fossilized contents of the strata. This layer, usually about two hundred and seventy feet in thickness, is entirely of fresh-water origin, but both above and below it are strata which show that there had been previous and subsequent invasions of the sea, the first forming the ichthyosaur and the latter the mosasaur beds. Owing to the uplift of the various mountain ranges, this great dinosaur graveyard is found to crop out along the entire eastern face of the Rocky Mountains, around the Black Hills and in all parts of the Laramie Plains. Dinosaur bones may be found almost everywhere, but up to the present, in no locality have they been seen in such profusion as in the two well-known places mentioned before.

In the excavations at the Como Bluffs the remains were found thoroughly scattered and from twenty to a hundred feet apart, an entire skeleton or even the larger part of one being extremely rare. In the Bone Cabin Quarry, on the other hand, the American Museum expedition found a vast number of skeletons, not only close together, but often closely commingled, remains of most of the animals of that region at that period, from the largest of the giant dinosaurs to the smallest and most bird-like kind. The Bluffs appear to represent the ancient shore line of a muddy estuary or lagoon, such as is depicted in the accompanying drawing of a *Brontosaurus* restoration by Charles

R. Knight. Prof. Henry Fairfield Osborn, curator of the Department of Vertebrate Palæontology at the American Museum, believes that at the Bone Cabin Quarry, on the other hand, the conditions were different; that this was the area of an old river bar which, in its shallow waters, arrested the more or less decomposed and scattered carcasses that had slowly drifted down stream toward it, from almost the entire region through which the river took its course.

The greatest of these creatures were the giant dinosaurs, and very probably no animals existing on land have ever approached them in size and bulk. The evidence of the freely commingled remains shows us that at least three distinct kinds of these giant dinosaurs existed at the same time in the same region.

The dinosaur named *Diplodocus* by Marsh is most completely known. The American Museum's first find in the Bone Cabin Quarry was the previously unknown hind limb of this dinosaur, a find that showed it was distinguished by relatively long, slender members and may popularly be called the "long-limbed dinosaur." The major portion of a great skeleton unearthed in the Bluffs and a larger one found about ten miles north of the Bone Cabin Quarry furnished practically complete knowledge of the great bony frame of this giant lizard. By contrast the second, the *Brontosaurus*, or "thunder saurian" of Marsh, was relatively shorter in body and more compactly built,

preclude the possibility of finding an entire skeleton. Especially is this true of the smaller bones, such as those of the head, or those not firmly bound together by strong ligaments. These often become scattered or so badly crushed by the weight of the strata which accumulate above them that it is not worth while to mount or even reconstruct them. The *Brontosaurus* now in course of erection at the American Museum is unusually well preserved, and it is, fortunately, of nearly the same size as the Yale Museum specimen. This fact smoothed over a number of difficulties. The skull was not found, and in fact is known only by incomplete portions of the jaw and of the back of the head. The reconstructed skull is based on these fragments and on the known skull of a nearly related species. The heads of these herbivorous dinosaurs, by the way, were comparatively small in size and altogether out of proportion with the ponderous body. We can hardly understand how this very small head with its light jaws and slender, spoon-shaped teeth could adequately supply the food necessary to nourish the great creature. Prof. Osborn is of the opinion that the animals fed on some very plentiful and nutritious water-plant, which was swallowed in large quantities without mastication, there being no grinders or molars in the head.

The *Brontosaurus* was among the most highly specialized of the herbivorous dinosaurs—probably the last of the race. Evidence of this is found in the

wonderful construction of the bones, especially of the vertebræ. The bones were excessively light for their size and strength. They are so shaped that every unnecessary particle is dispensed with, are hollowed out wherever possible and braced wherever necessary, and are porous in the centra. The accompanying photograph of the vertebræ clearly shows the remarkably efficient construction, from an engineering standpoint, to withstand the enormous strains and stresses incident to moving the huge bulk of a creature from 60 to 70 feet long. It shows also how similar the principle of structure is to the modern T-iron one. From the tip of the tail to the head the structure of the vertebræ changes with the mechanical requirements. Exactly what these were, however, has not been thoroughly studied, as little is known about the musculature of the body. A further demonstration that the *Brontosaurus* was highly specialized is given by the pelvis. In primitive vertebrates there is little connection between the pelvis and the backbone. Here the pelvis and the adjacent vertebræ are intimately connected. The anterior tail vertebræ are peculiarly shaped to strengthen the pelvis, and the one nearest to this is, in fact, a part of it. The lateral flange of this vertebra is in part probably a modified rib, being deepened to give added strength with which to resist the tremendous torsional strains on this portion of the frame, the pivotal center of motion undoubtedly being at the hips.

It is supposed that the two inverted V-shaped prongs under the hind legs were used to rest upon in a sitting

posture, and that there was a great pad of cartilage or connective tissue at the point of each V. It is not believed that the *Brontosaurus* was able to sit up on the hind legs and tail like the modern kangaroo, as at no point of the tail is found the peculiar bend or the fusion of vertebræ usual in this case.


The *Brontosaurus* was supposedly aquatic, but not marine. As in most aquatic animals, the ends of the bones at the joints are rough instead of smooth. It is, in fact, beginning to be doubted whether it ever came out on land, though the comparative lightness of its bones, usual in walking or flying animals, but not in swimming ones, seems to indicate that part, at least, of its life was spent out of the water. The five toes on the hind feet are thought to have been used to force the body along the muddy bottoms of the shallow lagoons which the *Brontosaurus* supposedly frequented. Palæontologists have not, however, accounted for the single claw on each forefoot. The fact that there really was only one claw on each forefoot is proven by the numerous fossilized footprints that have been found.

The mental and physical labor, the time and patience necessary successfully to complete a restoration of this kind, can hardly be appreciated by the layman. The expeditions that are sent out each year to search for fossils or to recover those already found, entail great labor and expense. The real work begins, though, with the removal of the fossils from the rock, clay, or shale matrix, and this excavation is a very



Covering the Excavated Bones with Plaster of Paris.

The figures on the plaster show what each bone is and where it was found.

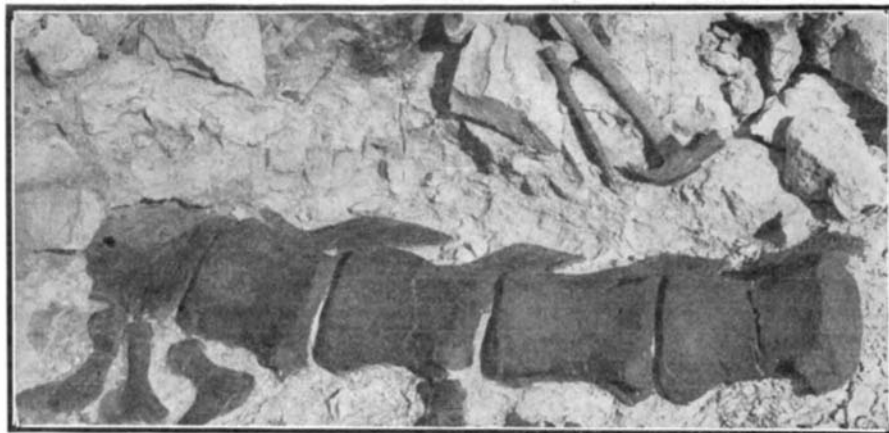

Appearance of the Fossil Bones when Uncovered.

THE RESTORATION OF THE GIANT LIZARD, THE BRONTOSAUR, AT THE AMERICAN MUSEUM OF NATURAL HISTORY, NEW YORK.

but more massive in structure. Considerable portions of the skeletons of perhaps a score of the great herbivorous dinosaurs are preserved in the Yale, Carnegie (Pittsburg), Field Columbian and American museums, while much less abundant and more incomplete remains have been found in England near Oxford. Of another type, and much smaller in size, were the carnivorous dinosaurs. They were bipeds with bird-like feet and sharp claws, and, in contrast with the two foregoing types, had large heads with sharp, pointed teeth. The marks of these teeth have been found upon the tail vertebræ of both *Diplodocus* and *Brontosaurus*, showing that if the carnivora did not destroy the ponderous and slow-witted lizards of the other types, they at least fed upon their carcasses.

In 1898 the largest known and at the same time the most complete *Brontosaurus* skeleton was discovered about three miles west of the Bone Cabin Quarry. It was worked out with great care, and is now being restored and mounted complete at the American Museum under the direction of Prof. Osborn. When finished it will be the only mounted skeleton of a *Brontosaurus* in the world, though at the Yale Museum the pelvis and hind legs of a dinosaur of this kind are mounted, and another splendid skeleton of a *Diplodocus* is being reconstructed at the Carnegie Museum, Pittsburg.

As can be readily understood, the natural processes incident to the preservation of these fossils almost

delicate operation, as the bones are brittle and fracture easily. As they are uncovered little by little, the bones are closely covered with tissue paper or very thin muslin and gum arabic. Over this, as they are gradually laid bare, plaster of Paris is applied, till the entire bone is covered. Sometimes, if the bones are much shattered, no attempt is made in the field to excavate them, but the surrounding matrix is cut out and shipped in a block. In the case of the large bones, the plaster envelope is strengthened with wooden ribs and the whole bound with wet rawhide which is then allowed to shrink and closely bind the whole. The fossils are next carefully crated and hauled to the nearest railroad siding for shipment. This sometimes means a bad trip of many miles over rough country and is frequently the cause of much difficulty.

The actual laboratory work of patching up fractured bones, restoring or reproducing missing ones, of putting them properly together and in a proper posture, means months of thought and labor. It can readily be understood that it is a matter of some difficulty to pose a skeleton 60-odd feet long and 15 feet high at the pelvis. Some of the individual bones are enormous. The femur of the hind leg is 5 feet 10½ inches long, the total length of the body being estimated at 66 feet, while the remarkably small head is only 27 inches long. In the Field Columbian Museum are preserved the limb bones of a related species, the *Brachiosaurus*, the femur of the hind leg being 6 feet 8 inches long. Assuming the proportions to be the same, the Chicago specimen would have been 70 to 72 feet over all.

The construction of the iron framework used in a restoration of this kind is no mean feat of practical engineering. The photographs of the hind and fore limbs give a clear idea of the way in which this is done. For supporting the weight of the large bones of the limbs and backbone, heavy wrought-iron pipe of large size is used. This is bent and curved so as to conform closely to the natural angularities, as shown. The bones are fastened to this by means of lighter piping and reducing crosses. Light channel irons and flat bands are also used, as may be seen in the manner in which the bones of the pelvis are supported and bound together. The photograph of the vertebrae shows how these are joined to the heavy supporting pipe by means of smaller pipe and reducing tees.

Some idea of the length of time that work of this kind takes may be gathered from the fact that it took two men at least a year to work the bones out of the matrix, at least six months to restore the missing parts, and at least ten months to mount the bones, weld and bend irons, etc. Nor does this include the time spent by the field parties or by Prof. Osborn and other scientists, and Mr. Adam Hermann, head preparator of the department, in planning and laying out the work.

This department of the American Museum is one of the most interesting ones in the institution. The collection comprises the extensive material collected by the late Prof. E. D. Cope, chiefly between 1870 and 1890, and the much larger collections made by the expeditions which have been sent out by the Museum every year beginning with 1891.

We are indebted to Prof. Osborn for courtesies in the preparation of this article.

The Congo (Belgian) Telegraph.

The telegraph and telephone lines of the Belgian Congo region show some peculiarities both in the construction of the lines and their operation, owing to the climate and the character of the country. Where the lines run through the forests, the wires are placed as much as possible upon trees and in other cases upon iron poles. The wire, which is of phosphor-bronze, is painted black, so as not to attract the attention of the natives, who lay hands upon all the copper they can find. The other brilliant objects of the line, such as the insulators, are also painted black. A cutting 30 feet wide is made through the forest for the line, so that there is no risk of fire or from falling trees. Besides the telegraph offices of Leopoldville, Kwamouth, and Coquithatville, there are nine telephone offices and six cabins. The latter are used for communicating with the steamboats on the river. The first hours after sunset are the best for telephoning, and it is possible to telephone direct from Matada to Kwamouth, or 380 miles. From the latter point to Boma, or 410 miles, the voice is still heard. After 10 o'clock A. M. the heat makes it impossible to use the telephone, especially in the rainy season. This is due to the fact that a return wire is not used, and the use of the earth return is accompanied by great disturbances in the middle of the day. The greatest enemies of the telephone lines are the wild animals. In the rainy season atmospheric discharges often strike the wires, therefore the lines need to be constantly inspected and repaired. Within the last two years the government has been experimenting with a wireless telegraphy system between Boma and Ambrizette to connect the land lines with the submarine cable.

THE TASMANIAN BLUE GUM—AN IDEAL TIMBER FOR HARBOR BUILDING.

BY HAROLD J. SHEPSTONE.

The erection of the great National Harbor, at Dover, on the south coast of England, has called attention to the wonderful properties of the Tasmanian blue gum (*Eucalyptus globulus*). It is at once one of the strongest as well as the most durable and densest timber in the world. It is so heavy that it will sink like a piece of lead, while it is also practically immune from the attacks of the seaworm. These facts have only lately been more or less known to timber experts, but the presence of a large number of piles of Tasmanian blue gum at Dover, where they were tested together with other timber, has shown in the most striking manner the superiority of this wood for the erection of staging in salt water.

Before dealing further with the wonderful strength and remarkable density of the blue gum, it is as well to note that the harbor where this wood is being extensively employed is one of the biggest engineering feats ever undertaken. It is being formed by extending the well-known Admiralty Pier at Dover some 2,000 feet, the erection of an eastern arm 3,320 feet in length, and the building of a breakwater 4,200 feet long. Naturally, the carrying out of such a huge undertaking called for an enormous amount of timber, the minimum quantity required being given as follows: Hardwoods, principally greenheart and rock elm, 25,000 cubic feet; and softwood, pitch pine, redwood, etc., 75,000 cubic feet for permanent work; and for merely temporary staging, 550,000 cubic feet of blue gum and other hardwood; and pitch pine, etc., for superstructure, 850,000 cubic feet; or some 1,500,000 cubic feet of timber in all.

It was not necessary, of course, to go to Tasmania for the execution of such an order, so far as quantity was concerned; indeed, some of the timber used for piles at Dover has been imported from Vancouver's Land, and on the whole there has been very little fault to find with it. Then why, one may well ask, did the contractors avail themselves of the services of their timber expert, Mr. W. Heyn, and dispatch him on a journey of 14,000 miles to Tasmania, to bring home piles which could have been purchased cheaper in America or Canada? The reasons were many. To secure Oregon piles 100 feet in length and 18 to 20 inches square (the necessary dimensions) was by no means difficult; but Tasmanian blue gum piles were preferable, chiefly on account of their greater specific gravity. In the first place, it was found impossible to get a pile of Oregon 100 feet in length into position for driving into the ground through 47 feet of water at low tide, on account of the strength of the tides and currents, unless it was "weighted" with iron at the end. This at once entailed an extra expense in material and labor of nearly \$50 per log.

But the blue gum possessed other advantages over its rival Oregon. The *Teredo navalis*, or seaworm, literally honeycombing its way through the latter, rendered it after some time unfit for further use as a pile. As a rule, the timber was injured through the ravages of this little animal after a period of about eighteen months to two years. Now, it is not difficult to see that as the piles are only employed to carry temporary staging, so as to enable the 40-ton concrete blocks of which the harbor walls are being built to be placed in position, a great saving is effected by using them over and over again as the blocks are laid. That was impossible for any great length of time in the case of Oregon wood, but with Tasmanian blue gum it was entirely different. Being immune from the attack of the sea insect, the greater proportion of the blue gum piles at Dover have been in constant use for over three years, some having been driven three or four times, and there is no reason why they should not be re-employed in this manner till the whole work is completed. On account of their high gravity it is not necessary to weight them, and should they get carried away by accident they would sink where they fell, and could easily be recovered, instead of floating about as Oregon would do, a menace to the works or to ships or steamers. Some idea of the density of this wood may be the better understood when it is stated that it has a specific gravity of 75 pounds to the square foot, whereas water is but 65 pounds. A pile of blue gum, therefore, 100 feet long and 20 inches square, would turn the scale at nearly 10 tons, while an Oregon log of similar dimensions, having only a specific gravity of 48 pounds per square foot, would only weigh 6 tons, and consequently float.

To obtain a pile 100 feet in length and 20 inches square, parallel from top to bottom, demands a tree 15 to 18 feet in girth 5 feet from the ground, and about 150 feet to the first branch. The Tasmanian blue gum easily attains this height. Indeed, so far as height and general beauty are concerned, the blue gum is no mean rival to the famous Redwoods of California. A large quantity of the timber to be seen at Dover came from the yards of Messrs. Gray Brothers, of Adventure Bay. Mr. Gray, the head of the firm, states that they

often come upon trees from which they could cut piles 160 feet long (that is, 60 feet longer than required by the contractors at Dover), before the first branch is reached, and others 230 feet high measure 7 feet through at the butt. Nor are these figures by any means the largest recorded for Tasmanian blue gum. Mr. Perrin, formerly Inspector of Forests in Tasmania and afterward in Victoria, mentions having measured a fallen blue gum at Geeveston (on the Huon River) which had a length of 330 feet; and Mr. R. M. Johnston, the eminent government statistician, speaks of "the Tolosa blue gum," also 330 feet high; and Baron von Meuller, the well-known Australian naturalist, says of a blue gum growing at Southport in Tasmania that it contained "as much timber as would suffice to build a 90-ton schooner." And when speaking of these giants, it should be borne in mind that they are not isolated cases, mere curiosities, but that trees of from 200 to 250 feet are fairly common in the forests, extending over thousands of acres in the Huon and Peninsula districts of Tasmania, rising high and clear of boughs like the masts of great ships.

The wonderful strength and lasting qualities of the Tasmanian blue gum have been more than demonstrated at the Dover Harbor Works, where their employment has given the greatest satisfaction, thus calling attention in the most emphatic manner to the commercial value of Tasmanian timber. Tests very carefully made and at long intervals show that the Tasmanian wood will sustain about double the weight of English oak before breaking, and will even regain its elasticity after bearing a weight at which oak breaks, while as to its longevity under water no limit appears so far to have been reached. Many instances could be quoted in confirmation of this statement. An old ferry-boat built of blue gum in 1818, and which for more than fifty years has been lying a wreck between high and low water mark on the banks of the Derwent in Tasmania, shows no signs of decay to-day, and the wood, beyond a few stains from the iron fastenings, is perfectly sound. A portion of this old vessel is shown at the Hobart Museum, among a collection of Tasmanian timber. In speaking of the commercial value of this particular wood, one must not forget that a good deal of it is to be found growing within six to ten miles of the seashore, thus considerably reducing the difficulties of transportation to the timber ships, which is effected on rudely-formed tramways.

Another Tasmanian tree deserving of mention here is the stringy bark (*Eucalyptus obliqua*). In height and size this tree is quite equal to its brother, the blue gum, and when cut it is by no means easy to distinguish it from the blue gum. Its specific gravity is usually about five pounds per cubic foot less, but it is often found with knots, which render it less desirable for piles required to carry very heavy loads, besides being more liable to seaworm attacks. It closely resembles English oak, particularly when used for flooring, for which it is well adapted.

It is interesting here to note that sleepers cut from the stringy bark and blue gum are most excellent. They have been used on the Dover Harbor Works for four years, exposed to the most trying weather, salt and fresh water, very heavy traffic of locomotives, goliath cranes, etc., being continually shifted and re-laid as the engineers of the service require, and yet they are in as good condition to-day as they were when first put down. Large quantities of these sleepers are being sent from Hobart to South Africa, where they are highly esteemed. Their great feature is their durability, their average life being no less than twenty years. They cost about \$1.50 each, against \$1 for Baltic or soft timber sleepers, which do not last one-third of the time. This wood is also admirably adapted for wood paving, and if properly laid on a good concrete foundation, will last under heavy traffic fifteen to twenty years, and does not polish through use, thus giving a sure foothold for horses.

The Huon pine is another Tasmanian wood deserving of notice here. For exquisite beauty when polished and for all decorative purposes it certainly comes before the stringy bark. Of this timber Mr. R. M. Johnston says: "It is the grandest and most beautiful of all Tasmanian soft woods." Though so beautiful that it appears little short of wicked waste to use it for any but decorative purposes, it is, in truth, remarkably long lasting, declining to succumb to the attacks of insects, whether in water or on land. It is largely used in boat building. Still another beautiful wood is the Tasmanian blackwood, a species of acacia, which very closely resembles mahogany, and which is used by the English government at Woolwich Arsenal in the manufacture of gun carriages. It is also employed in the making of billiard tables, sideboards, and decorative work.

For much of the above information, and for the loan of the photographs accompanying this article, the writer has to acknowledge his indebtedness to Mr. W. Heyn, head of the timber department of Messrs. S. Pearson & Son, the contractors for the Admiralty Harbor Works at Dover. As already mentioned, Mr. Heyn was sent

to Tasmania to select piles, and while there, at the request of the Tasmanian Ministry, read a paper before the Royal Society of Tasmania on the timber in that colony. Being acknowledged as an expert on the subject, and having had a long experience in Baltic and American timber, his remarks were naturally listened to with considerable attention, and printed for circulation in the state by the government. In an interview with the writer, he was enthusiastic about the wonderful properties of the Tasmanian timber, but spoke sadly of the waste he witnessed in the great forests of that state, caused through bushfires and useless ring-barking, etc. At the same time he had a good word to say for the Tasmanian axmen, declaring them to be among the finest in the world, as the splendid workmanship shown in the squaring of the Dover piles proves. Indeed, at a short distance, it is difficult to distinguish whether they are sawn or hewn. It is a curious fact, and complimentary to American industry, that they infinitely prefer the American ax to that made in any other country.

Before leaving Tasmania Mr. Heyn read a second paper before the Society, in which he declared that the government of that State could take a leaf from the method of the Agricultural Department at Washington by establishing a school, or schools of forestry such as are to be found in the United States and other great countries. The work of such an institution should include, in his opinion, the importation of desirable seeds from different parts of the world, as well as collection of native seeds for afforesting the waste lands on the island; growth and distribution of nursery stock, particularly of trees likely to benefit, materially and physically, Tas-

Solanum commersoni, and comes from Uruguay. He obtained some specimens from Prof. Davin, of the Marseilles Botanical Garden, who had recently secured some of the plants. M. Labergerie commenced planting the potatoes in a fertile and wet soil on the banks of a stream. They began to grow regularly, and in 1904 he already had 11,500 plants. He finds that the yield is no less than 100 tons per hectare (which figures about 30 tons per acre) in wet soil, and but 3 tons per acre in dry soil. The potatoes are exceptionally large and weigh $2\frac{1}{2}$ pounds, and at the same time



TASMANIAN AXMEN SQUARING BLUE-GUM PILES IN THE BUSH.

COMPLETION OF THE EAST BOSTON TUNNEL.

The completion of the East Boston tunnel marks the inauguration of one of the many rapid-transit subway systems which are being constructed in the leading cities of the world. The tunnel was built by the Boston Transit Commission, under Mr. Howard A. Carson as Chief Engineer; and it forms a most important extension of the system of trolley subways which that city constructed several years ago. We take this opportunity to refer to the indebtedness of New York city and all municipalities that either already have, or will shortly inaugurate, subway systems to the city of Boston, which, in successfully putting through her subways, proved the practicability and great convenience of such a system where the traffic conditions on the surface are badly congested.

The new tunnel extends from Scollay Square, an important station on the Boston Subway, beneath a wide arm of Boston Harbor, to Maverick Square in East Boston, the total distance between these two points being 7,480 feet, or 1.4 miles. From Maverick Square the tunnel falls on a grade that varies from 4.7 to 5 per cent for a distance of 2,000 feet. Here the lowest point of the tunnel below low water is reached, the bottom of the masonry being 82.3 feet and the top of the rail 73.3 feet below mean low water. At this point is located a pump well, where all water that enters by seepage is collected and pumped out. The location of the well is about 550 feet out from the East Boston shore line. From this point the tunnel rises for about 2,000 feet on a grade of 0.5 per cent, until it reaches a point approximately below the Boston harbor line. The grade then steepens to 2.5 per cent



SPAN OF OXEN AT WORK IN A TASMANIAN BLUE-GUM FOREST.

mania; and practical teaching, with ocular demonstration, of the art of forestry to those desiring it. The institution would also see that the laws for the protection of forests were rigidly enforced.

A New Variety of Potato.

M. Labergerie has been making some experiments in France upon a new variety of potato which not only has the advantage of growing in damp earth, but gives an extraordinary yield. This variety is known as

are of good quality. The branches of the plant are as long as 12 feet. The potatoes contain a large proportion of starch, and he finds 17 per cent in the present specimens. The taste is good, and in this regard will compare very well with the ordinary varieties. The plant is considerably influenced by water and light. It appears that the *Solanum* was considered formerly as only good for cattle, but we now find that it can be developed so as to be nutritious and good-tasting. At the same time it prefers wet soil where ordinary potatoes will not flourish.




"BIG BEN" GUM TREE.


Its height is nearly 250 feet; its circumference, five feet from the ground, is 95 feet; its interior measures 20x25 feet.

until the first station on the Boston side is reached, at a point just beyond Atlantic Avenue. Another 1,500 feet on an upgrade of 4 per cent, reducing in the last 300 feet to 2.5 per cent, brings the tunnel to near Devonshire Street station, and then 500 feet of 3.5 per cent ascent brings the new tunnel to a junction with the existing Subway at Court Street adjoining Scollay Square.

Apart from its great importance as affording a direct double-track trolley road from Boston to East Boston, the tunnel possesses particular interest because of the

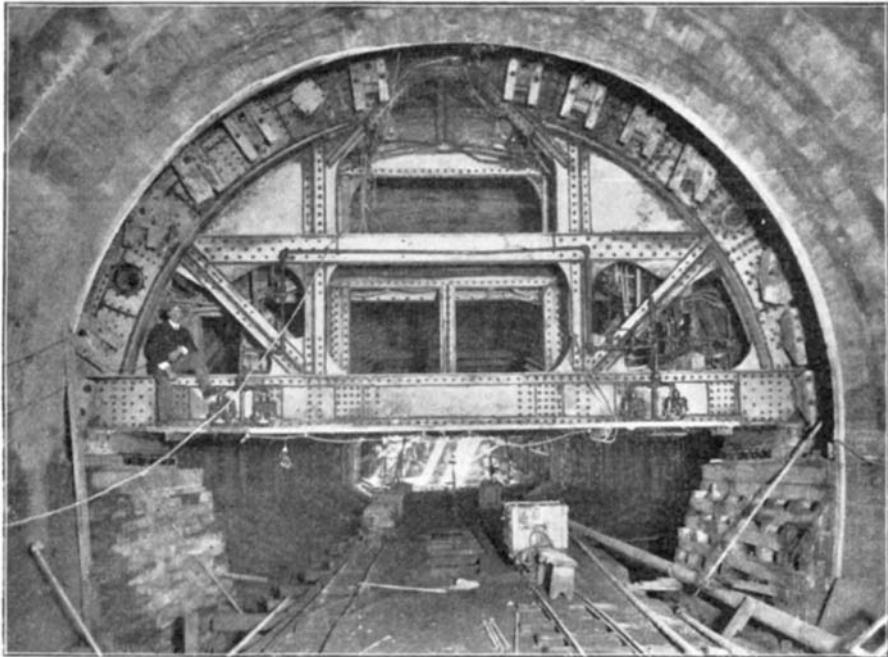


Rear View of Shield With Which the Upper Half of Tunnel Was Excavated.

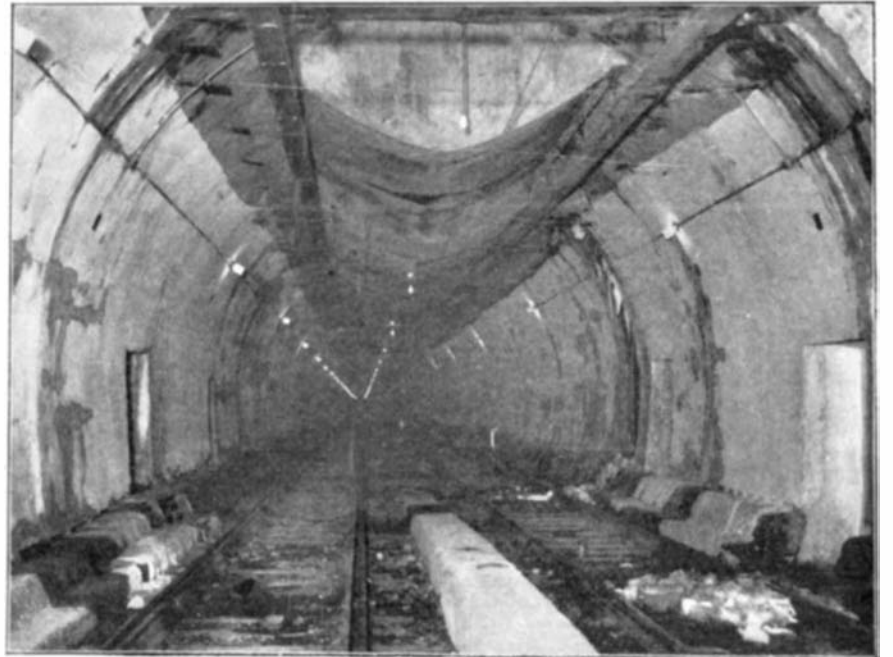


View in Completed Tunnel, Showing the Ventilating Duct in the Roof.




Devonshire Street Station, Showing Method of Interior Finish.

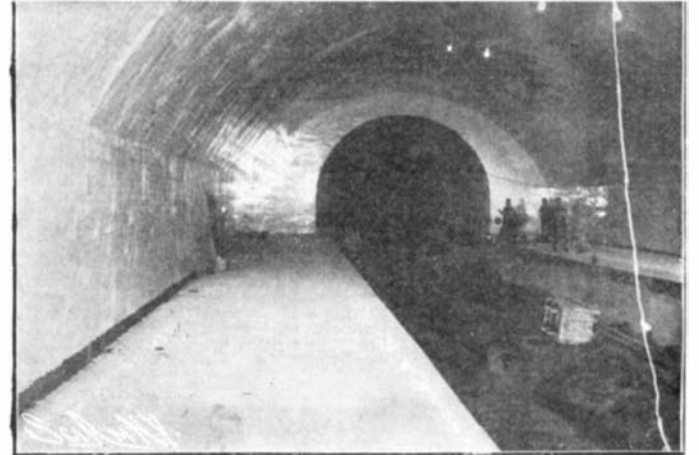


View in Completed State Street Station.

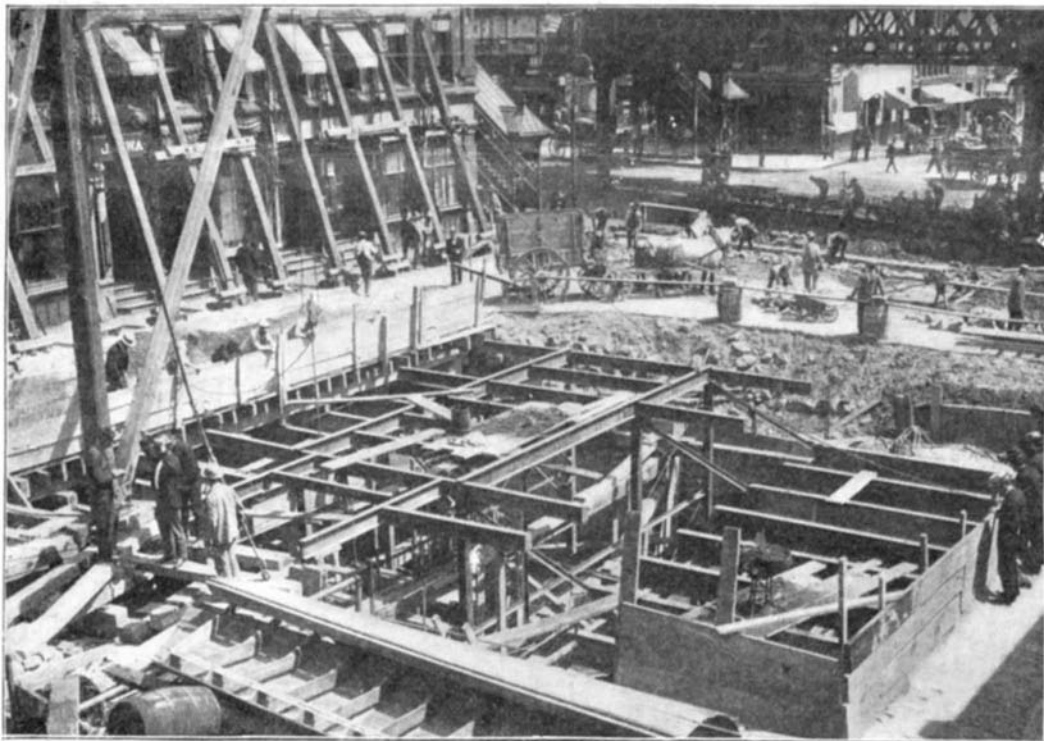

State Street Station Under Construction.

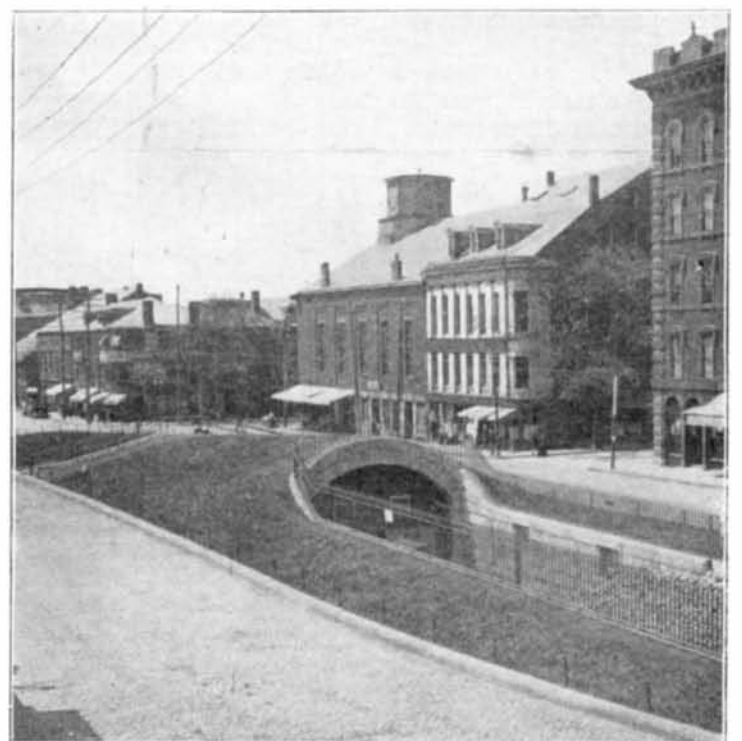

Exit, Maverick Square, East Boston.

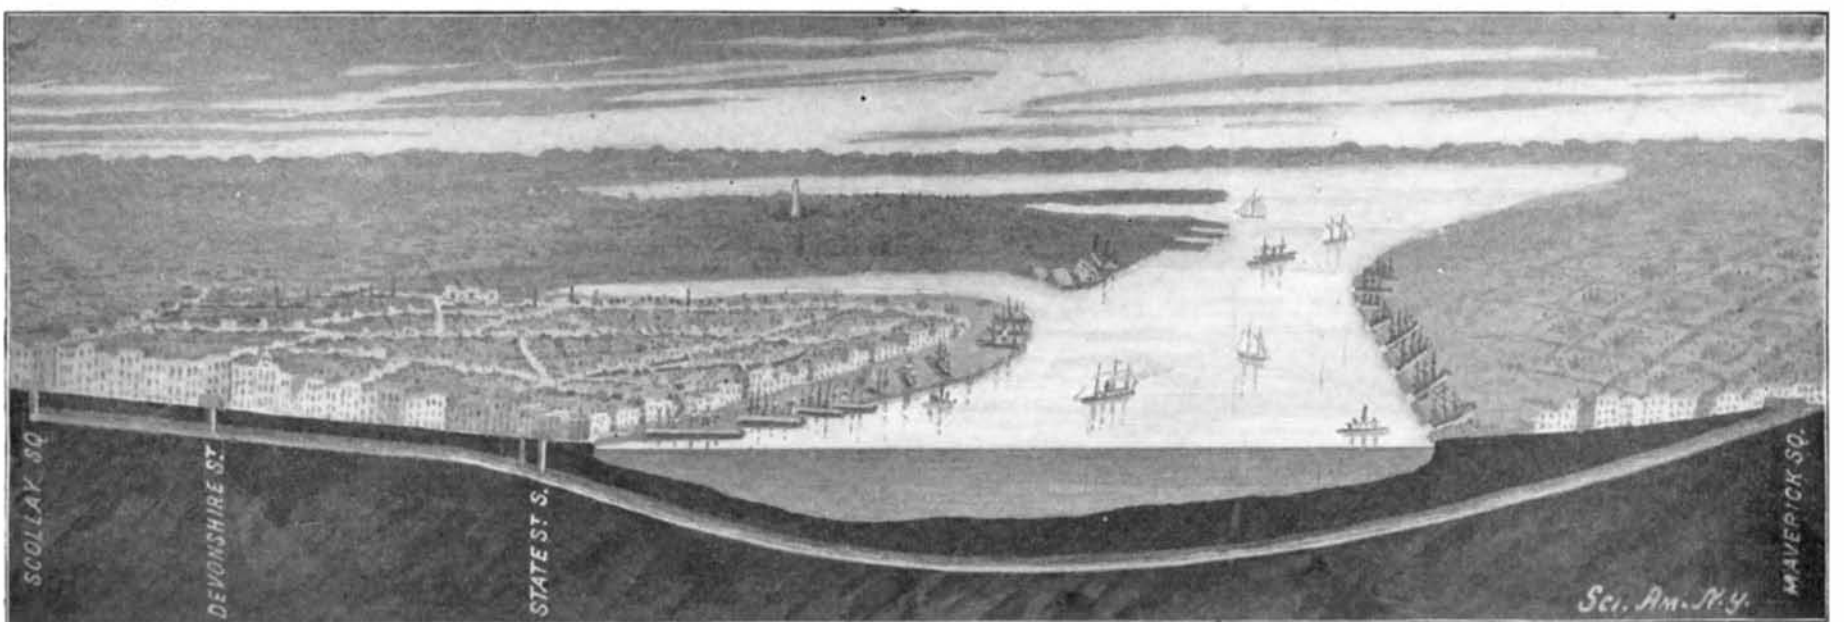

Sectional View of the New Tunnel from Scollay Square, Boston, to Maverick Square, East Boston.
COMPLETION OF THE EAST BOSTON TUNNEL.

boldness of the plan upon which it was so successfully carried through. In the first place, it is notable as being the only double-track tunnel thus far built in America. The tunnels under the Hudson River and under the St. Clair River, and those now under construction beneath the East River, in connection with the Brooklyn Rapid Transit lines, being single-track tunnels and of considerably less sectional area. The width of the tunnel under the harbor where it is lined with ribbed tile is 23 feet, and in the upper part of State Street and Court Street it is 23.67 feet wide. The height of the tunnel from the top of the rail to the roof in the upper part of State Street and Court Street is 14.17 feet, and in the lower part of State Street, and under the harbor, the height is 17.3 feet. The excavation was done partly in open cut, this method being used where the tunnel lay near the surface, and there were no physical or other difficulties to prevent its use, and partly by means of shields and compressed air, the latter system being used in the construction of about 4,900 feet of the tunnel. It is the latter part of the construction that is most interesting, because it was carried through by an entirely new and exceedingly bold method which, as far as we know, has never been attempted under similar conditions.

When the borings for the proposed tunnel were made, it was found that it would pass through a stratum of exceedingly fine boulder clay, of a consistency much firmer and more reliable than is usually found in subaqueous tunneling of this kind. Hitherto in such tunnels, where the shield has been used, among which might be mentioned the Blackwall tunnel under the Thames, London, and the tunnels under the St. Clair and Hudson rivers in this country, it has been customary to use a completely circular shield, which is pushed forward by hydraulic pressure, the tunnel as it is excavated being lined with a heavy segmental cast-iron lining, which is bolted together and grouted to render it perfectly water-tight. For a double-track road like this, however, the use of a circular tunnel would have involved much more excavation than was really necessary to accommodate two lines of trolley cars, there being a considerable amount of waste space in such a tunnel both above and below the cars. The engineer, therefore, determined to take advantage of the firm nature of the material, and build the tunnel with a semicircular roof, perpendicular side walls, and a flat invert. The irregular section that this method necessitated, made it impossible to use a shield in the ordinary way. Consequently, a semicircular half-shield was used for the construction of the upper half of the tunnel, and the lower half was built by means of drifting, in the manner now to be described.

Two bulkheads were constructed, one at each end of the central portion of the tunnel extending below the river, and these were provided with the usual air locks. The next step was to drift out two small tunnels, one in the line of each side wall, and large enough to permit these walls to be built therein. The walls were built of concrete and carried up to the springing of the semicircular arch. On the top of the walls was laid a heavy trackway, upon which rested the ends of the semicircular shield. The shield was then advanced by hydraulic pressure in the customary way, the clay being dug out, passed back through the central openings, and removed through the air locks. The concrete roof, three feet in thickness, was then rammed in place, being temporarily supported on falsework, in the customary manner. The material lying between the side walls was then excavated down to grade and the concrete invert was built in place. Except for a blowout, and one or two minor accidents, this very bold and original method of excavation was carried through successfully. The pneumatic pressure served to hold the clay in place until the concrete side walls, arch, and invert had been built in place and given sufficient time to harden. The boldness of this scheme will be appreciated when we remember that at extreme high water, the bottom of the excavation was exposed to a head of about 100 feet of water, and that until the concrete shell had been built in and had set there was nothing to prevent inward collapse, except the natural tenacity of the clay, assisted by the pneumatic pressure.

The work presented many features of engineering interest, arising in some cases from the cramped location, and in others from the fact that lofty buildings abutted on the tunnel and care had to be taken to provide against lateral displacement. To relieve the lateral thrust due to the weight of the concrete arch, and its superimposed load, a series of cross-tie rods with turnbuckles was let into the arch near the crown. These were so arranged that when the concrete had set, the rods could be removed. In some portions of the tunnel near the high levels, the structure was built with a flat roof, the necessary bending strength being secured by embedding twisted steel rods in the concrete—a method of construction known as reinforced concrete.

In order to secure proper ventilation, an air duct was formed at the crown of the arch, extending from

Webster Street, East Boston, to and under the harbor to the Atlantic Avenue station. It has a cross section of about 48 square feet, and is formed of a diaphragm one inch in thickness, made of metal and inclosed in cement mortar. This diaphragm is attached to the tunnel walls by steel rods and plates which are then incased in concrete. At the center of the duct, midway between the two ends, is a partition which divides it into two approximately equal portions. On each side of the partition there are fourteen openings, each 4 feet long and 1 foot 5 inches wide, formed in the flat portion of the ducts; and at intervals of about 550 feet there are other groups of openings diminishing in number as they approach the chambers above the surface in which the fans are located. These openings are fitted with doors which can be opened or closed from the tunnel below. Fresh air enters the tunnel from the portal at East Boston and through the station near Atlantic Avenue. This air moves to near the middle of the tunnel and then passes up through the openings into the duct, through which it is drawn back to the east and to the west, and leaves the tunnel through the ventilating fans located near each end of the tunnel.

Work on the tunnel was commenced May 5, 1900, so that the work has taken about four and a half years to complete. Its approximate cost is \$3,300,000.

THE NEW GRAND CENTRAL STATION, NEW YORK.

(Continued from page 40.)

is considerably the largest of its kind in the world. Its width is 160 feet, its length 470 feet, and the height from the floor to the top of the domed roof is 150 feet. The noble arched and domed roof of the concourse will extend entirely across the full width of the station building, a distance of 300 feet, or from Vanderbilt Avenue to Depew Place; but the concourse floor will be carried westerly under Vanderbilt Avenue for a distance of 170 feet. Back of the concourse, and located under the ticket lobby, will be the main waiting room, which will have twice the area of the waiting room of the present station. Surrounding it will be several retiring rooms, telephone and telegraph booths, and the various other conveniences of a modern station. Back of the waiting room will be a large restaurant, located beneath the broad approach to the station. Across the northerly end of the concourse will extend the customary line of gates admitting to the express platforms. Beyond the gates will be located no less than thirty-four stub tracks, with broad platforms between them, the average width being about 16 feet, extra space being provided, in order to avoid the crowding which is such a troublesome feature under existing conditions. Of these thirty-four tracks, the westerly eight or ten will be reserved preferably for incoming trains, and the arriving passenger, on passing through the gates onto the concourse, will find himself opposite a large cab stand, and with conveniences right at hand for securing his trunk and driving away with it with as little delay as possible. In addition to leaving directly by cab, he has the choice of four other means of exit from the station; for he may pass by a covered walk directly to the Subway, or by a 25-foot stairway to the concourse gallery and so into the main ticket lobby, or he can pass out to Madison Avenue and Forty-third Street by a covered subway, or crossing the concourse, he may leave by another covered subway to Lexington Avenue. It will be understood, of course, that the thirty-four tracks extend the full width of the concourse, the most easterly track abutting on Depew Place and the most westerly on Vanderbilt Avenue, and this, of course, necessitated some careful engineering work in supporting above these tracks the immense weight of the northerly half of the station building, containing the company's offices. Care has been taken to so arrange the supporting columns that none of them shall interfere with the passenger platforms. To recapitulate, it should be explained that the ticket lobby and the gallery are at street level, and the express tracks, the main concourse, the express waiting rooms, and the restaurant are at a level 15 feet lower than that of the street.

The plans for the new station involved, as an absolute prerequisite to success, that the suburban travel should be entirely separated from the express; and it was considered that the best way to insure this was to place the suburban tracks below the express tracks and provide a suburban concourse, waiting rooms, and other conveniences on this lower level. Moreover, it was decided that, with a view to further separating the two classes of travel, separate entrances and exits should be provided, so that the suburban passengers could enter or leave the lower level from the street or the Subway without meeting the long-distance travel. Access to the suburban tracks and station is obtained by gradually depressing the two outside tracks in the entrance tunnel below Park Avenue until they reach the lower level. In the rush hours the suburban trains will pass into the station and around a loop which will extend beneath the res-

taurant on the express level, the trains passing out again without breaking bulk. Toward the close of the rush hours, alternate trains will discharge their passengers from the series of seven stub tracks, which occupy the train space within the loop and in front of the suburban concourse. Trains will be stored here and in the station yard until the evening rush hour, when they will be switched out into service again. Provision is made at the inner end of the loop for connection direct to the tracks of the Rapid Transit Subway below Fourth Avenue; and it is a fortunate circumstance that Mr. Parsons, the Chief Engineer of the Subway, by moving the two tunnels below Park Avenue over toward the curb line, made provision for this connection with the New York Central system, although, at that time, the New York Central Company was not disposed to consider any such connection.

The suburban station is provided with a broad concourse and with the necessary waiting room and other conveniences, all arranged on the lower level, and with separate exits both to the Subway and to the street. This station is, to all intents and purposes, absolutely independent of the express station above; although provision is made by means of staircases for communication direct from the ticket lobby and the main concourse to the suburban station.

In conclusion, it should be mentioned that the capacity of the Park Avenue tunnel has been increased at least one hundred per cent by the great enlargement of the station yard. One of the most serious obstacles to a further increase in the number of passenger trains under existing conditions, is the fact that the storage yard for express trains is at present located at Mott Haven, and every express train that enters New York has to make the trip through the tunnel four times, twice in entering and leaving the station with passengers, and twice in making the round trip to the yard for cleaning purposes. With the enlarged area of yard provided in the new arrangement, the storage of express trains will take place at Forty-second Street, and the tunnel will be relieved proportionately.

The whole of the station yard will be operated electrically, as will also the suburban trains on the New York Central, the Harlem, and the New Haven Railroads. Suburban trains will be operated on the multiple-unit control system with motors on the car axles, and shorter trains will be run at more frequent intervals. The long-distance expresses will be hauled as far as Croton on the main line, White Plains on the Harlem Division, and Portchester on the New Haven Road, by electric locomotives. It is expected that the local service will be in operation in from two to three years' time, and that the whole scheme will be completed about a year later.

The Current Supplement.

The current SUPPLEMENT, No. 1516, opens with a continuation of our correspondent's review of the Paris Automobile Show. His two articles, taken in connection with the Automobile Number of the SCIENTIFIC AMERICAN, which is to bear date January 28, will give the reader a most excellent review of automobile progress in Europe and America. Mr. Ambrose Swasey writes on "Some Refinements of Mechanical Science." Dr. O. F. Herz discusses at length the great frozen Siberian mammoth which he unearthed in 1901, in an almost perfect state of preservation. Splendid pictures accompany the text. Prof. William Bateson's article on breeding and heredity is continued. Prof. G. W. Ritchey presents another chapter on the "Modern Reflecting Telescope, and the Making and Testing of Optical Mirrors." In this installment he discusses silvering. Arthur Gulston's splendid discussion of ice-breakers and their services is concluded.

Next Week's Special Automobile Issue.

This is the season of the year when the prospective automobile buyer casts about him for a machine that suits his taste and purse. For several years the SCIENTIFIC AMERICAN has come to his assistance by publishing special automobile issues, in which the very latest types of cars, big and little, costly and cheap, have been described with a fullness of detail and a wealth of illustration that have been of immense assistance in such a selection. This year the SCIENTIFIC AMERICAN will outdo anything it ever before attempted in this direction. Next week's Special Automobile issue will contain forty-four pages, and will be larger than any of its predecessors. The subject of the colored cover is a wild automobile ride through a blinding snowstorm.

Naturally, the issue will be devoted largely to the products of American manufacturers; but the foreign maker has by no means been forgotten. Commercial vehicles, novelties of the Automobile Show, motor bicycles, racing cars, automobile accessories, are also discussed. For the general reader extra pages have been incorporated in the issue, which pages are devoted, not to automobiles, but to the usual subjects described and illustrated in these columns.

RECENTLY PATENTED INVENTIONS.

Of General Interest.

ANIMAL-TRAP.—J. KERNS, West New York, N. J. In the present patent the object of the inventor is to provide a new and improved animal-trap, more especially designed for trapping alive fish, crabs, and other animals, the trap being simple, easily set, and quick in action. The trap can be readily lowered into the water for the fish, crabs, etc., to get to the bait and to become entrapped alive within a basket.

PLUG.—E. M. HALL, Raymondville, N. Y. Mr. Hall's present invention is an improvement in plugs for use in rolls of paper, and has for its object the provision of a novel construction whereby to prevent the plug from slipping out of the roll during storage and shipment of such paper-rolls.

DUMB-WAITER SHAFT.—G. GERAERTS, New York, N. Y. In this patent the invention relates to masonry; and its object is to provide a new and improved dumb-waiter shaft or like structure formed mainly of building-blocks or tiles and arranged to insure the formation of light but exceedingly strong and durable walls.

CUFF-HOLDER.—A. P. GILLEN, Chicago, Ill. The invention relates more especially to that type of cuff-holders which are secured within the coat-sleeve and secure the cuff independently of the shirt-sleeve. The principal object is to provide a holder in which the cuff may be readily adjusted without changing the position of the holder within the sleeve. A further object is to provide a holder operated by pressure upon the outer surface of the sleeve and which is so constructed that it may be set and held in open position ready to receive the cuff, so it may be introduced and secured with great ease and rapidity.

DENTAL TOOL.—E. FORQUIGNON, New York, N. Y. The inventor's object is the provision of a dental tool to be used for scaling off calcareous deposits from the teeth and also to enable the dentist to conveniently and quickly form and scrape a tooth-carrying rubber plate to accurately fit the same against the hard palate or roof of a person's mouth.

PAY-ROLL.—C. T. CHICHESTER, Placerville, Cal. The intention of the inventor is to provide a new and improved pay-roll for the use of merchants, contractors, lumbermen, or other employers of labor arranged to embrace a time-book, a ledger, and a receipt-book to show at a glance how an account between an employer and an employee stands at any time.

SINGLE-TRIGGER MECHANISM FOR DOUBLE-BARREL GUNS.—J. C. BROYLES, Birmingham, Ala. The invention relates to locks for double-barrel guns, and particularly to that class wherein a single trigger controls and operates both hammers. The trigger is so arranged that by sliding forward or back it is adapted to come in contact with the respective sears of the two hammers. Thus either barrel may be fired at will, according to the position in which the trigger is set, or the barrel may be fired successively without such shifting of the trigger.

PASTE FASTENING FOR RUGS OR CARPETS.—C. C. CONNER and T. GRIMMER, New York, N. Y. The invention of Messrs. Conner and Grimmer relates to fastenings for rugs or carpets, their more particular object being to produce a fastening of suitable form to be held in place by paste and, if desired, to utilize a partial vacuum as an auxiliary means for securing the fastening in position.

SPRING-ROLLER.—W. A. HADDEN, New York, N. Y. In this case the invention refers to improvements in spring-rollers particularly adapted for use with heavy shades, displaying fabrics, and the like. With a spring-roller as usually constructed it often happens that in rolling up, the end of the shade or other material will, through the spring force, pass over the roller several times, thus weakening the spring force and making it necessary to remove the roller to rewind the spring. The invention provides suitable means to obviate the above difficulties.

Hardware and Tools.

WRENCH.—H. PHELAN, Jimenez, Mexico. Mr. Phelan's invention relates to improvements in wrenches of the type having a fixed jaw and a sliding jaw, an object being to provide a wrench of this character that will be comparatively light yet strong and that may be quickly adjusted to a nut or pipe.

Prime Movers and Their Accessories.

EQUALIZING-GEAR FOR RECIPROCATING PRIME MOVERS.—M. NEUMAYER, New York, N. Y. The inventor's object is to provide a power-equalizing gear for prime movers having a pair of cylinders and pistons reciprocating therein, arranged to give the piston which has passed a central position a rapidly increasing mechanical assistance from the other piston to eliminate all danger of the prime mover stopping when a piston reaches the central critical position referred to.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. **In every case it is necessary to give the number of the inquiry.** MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

Inquiry No. 6404.—For manufacturers of the electric candy machine known as "Fairy Floss" or "Cotton Candy."

For logging engines. J. S. Mundy, Newark, N. J.

Inquiry No. 6405.—For makers of decorative glass spangles or ornamental cut glass.

"C. S." Metal Polish. Indianapolis. Samples free.

Inquiry No. 6406.—For manufacturers of copper plated sheet iron and steel.

Perforated Metals. Harrington & King Perforating Co., Chicago.

Inquiry No. 6407.—For paper decorative panels for tapestry work, also for theatrical scenery from which to paint.

Handle & Spoke Mch. Ober Mfg. Co., 10 Bell St., Chagrin Falls, O.

Inquiry No. 6408.—For makers of a pneumatic drag saw.

Adding, multiplying and dividing machine, all in one. Felt & Tarrant Mfg. Co., Chicago.

Inquiry No. 6409.—For information concerning "Patrick Metal."

Sawmill machinery and outfits manufactured by the Lane Mfg. Co., Box 13, Montpelier, Vt.

Inquiry No. 6410.—For disks of prepared paper for igniting wicks of pocket cigar lighters; the disks are about 1 inch in diameter, having on the face small patches of chemical substance.

Special Machinery to order, manufacturing, metal stampings, etc., Brickner Machine Co., Tiffin, Ohio.

Inquiry No. 6411.—For makers of fancy paper shades for electric light globes.

Robert W. Hunt & Co. bureau of consultation, chemical and physical tests and inspection. The Hookery, Chicago.

Inquiry No. 6412.—For makers of wooden blocks containing spirit plumb.

Patent for sale or on royalty.—Combination watch, fob chain, key and chatelet bag protector. D. Summa, 129 Thompson Street, New York City.

Inquiry No. 6413.—For makers of wooden thumb screws.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Machine Company, Foot of East 138th Street, New York.

Inquiry No. 6414.—For dealers in patented novelties.

I have every facility for manufacturing and marketing hardware and housefurnishing specialties. Wm. McDonald, 190 Main St., East Rochester, N. Y.

Inquiry No. 6415.—For makers of steam engines from $\frac{1}{2}$ to 1 h. p.

THE SCIENTIFIC AMERICAN SUPPLEMENT is publishing a practical series of illustrated articles on experimental electro-chemistry by N. Monroe Hopkins.

Inquiry No. 6416.—For machines for making briquettes from marsh mud, or who control the process.

WANTED.—Revolutionary Documents, Autograph Letters Journals, Prints, Washington Portraits, Early American Illustrated Magazines, Early Patents signed by Presidents of the United States. Valentine's Manuals of the early 40's. Correspondence solicited. Address C. A. M., Box 773, New York.

Inquiry No. 6417.—For machinery for cleaning clothing.

Any metal, sheet, band, rod, bar, wire; cut, bent, crimped, punched, stamped, shaped, embossed, lettered. Dies made. Metal Stamping Co., Niagara Falls, N. Y.

Inquiry No. 6418.—For makers of ice machinery and outfit; also for makers of corrugated iron arches for building.

We manufacture gasoline motor and high-grade machinery, castings best quality gray iron. Select patterns, and let us quote prices. Frontier Iron Works, Buffalo, N. Y.

Inquiry No. 6419.—For large quantities of draw knife with 6-inch blade.

Manufacturers of patent articles, dies, metal stamping, screw machine work, hardware specialties, machinery and tools. Quadriga Manufacturing Company, 15 South Canal Street, Chicago.

Inquiry No. 6420.—For makers of bottles for soda water with Codd's ball stoppers.

WANTED.—Having a thoroughly organized agency force, we are desirous of securing Exclusive Pacific Coast Agency of Articles of Merit, where personal solicitation is required. Address Suite No. 2, 47 Geary Street, San Francisco, Cal.

Inquiry No. 6421.—For makers of earthen baking utensils containing asbestos.

CALCULATING MACHINES.—Wanted, first-class firm willing to take up the agency and sale in the United States and Canada of a well-known calculating machine. Terms very favorable. Apply Grimme, Natalis & Co., Braunschweig, Germany.

Inquiry No. 6422.—For makers of fiberloid. Rowe's Automatic Carpenter's Hammer Device.—United States, Canada and Great Britain patents granted. Will sell same outright, consider royalty or correspond with some one with capital. Send for descriptive circular. Geo. H. Rowe, Patentee, Box 442, Ennis, Texas.

Inquiry No. 6423.—For machinery for the desiccation of coconut.

Inquiry No. 6424.—For makers of call boxes similar to those employed by the Western Union Co.

Inquiry No. 6425.—For makers of woven wire bed springs, also spiral springs.

Inquiry No. 6426.—For machinery for evaporating sweet corn for table use.

Inquiry No. 6427.—For makers of art metal furniture.

Inquiry No. 6428.—For makers of electric storage batteries, such as are used for propelling automobiles and recharged by electricity.

Inquiry No. 6429.—For parties to build 1,000 or more autos per year, complete, on contract, drawings and samples furnished.

Inquiry No. 6430.—For an estimate of cost of small plant of machinery for making tin boxes of all sizes.

Inquiry No. 6431.—For makers of hollow wire, small pressure tank and gasoline lamps.

Inquiry No. 6432.—For machinery and appliances for oil refining.

Inquiry No. 6433.—For makers of door openers and closers.

Inquiry No. 6434.—For machinery for crushing and grinding green foodstuffs, to prepare same for drying, also for machinery for such drying.

Notes and Queries.

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question. Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(9520) W. A. T. asks: Would you kindly give me directions for a spark coil for 3-horse-power gasoline engine? Size of core, feet and number of wire for primary; also feet and number of wire for secondary. I have 550 feet of No. 18 cotton-covered wire that I would like to work into the coil. Want coil to give about $\frac{1}{2}$ -inch spark. A. SUPPLEMENT No. 1281, which we have sent you upon your order, gives full information concerning a coil for gas engine ignition, if one has general knowledge of the work of construction. Lacking this, it would be best to get Norrie's "Induction Coils," price \$1, which gives detailed instruction in this work, together with tables of data for all the parts of coils of all sizes up to a 12-inch spark. Do not use so coarse a wire as No. 18 in a secondary coil, and use a coarser wire in the primary. Two layers of No. 14 will be right for primary, layer 6 inches long. Three-fourths pound of No. 36 silk-covered will be right for secondary to give a half-inch spark. Core should be $\frac{1}{2}$ to 1 inch in diameter and 7 inches long. 2. If a person sparked his engine with a magneto, would he need a coil also? A. A magneto can be made which will render a coil unnecessary, but a battery and coil are necessary till the machine has speed enough to enable the magneto to generate.

(9521) C. S. J. asks: I wish to learn the cause of trichinae in pork. A. The trichina spiralis is a worm, a parasite of the hog. It is often found in great numbers in the flesh of these animals, in the encysted condition but still alive. If such meat is eaten without cooking thoroughly, the parasite is taken into the body and is rapidly propagated. The worm came originally from the rat. As hogs eat rats, they pass into the hog and thence into man. The only preventive is thorough cooking. This kills the trichinae. No rare or underdone pork should ever be eaten. The risk is too great. The cost of immunity is so little, that anyone may be safe. Cook all pork thoroughly. 2. The cause of ptomaine poisoning by eating pork. What causes the presence of the poison, how the poison can be prevented, and whether or not there is any way of detecting the presence of poison before using the meat? A. Ptomaines are formed by decomposition. If only fresh food is used, one will be safe from these poisons.

(9522) H. S. N. asks: I have been a reader of your paper for several years, and always enjoy reading it. I should like to submit a problem for solution. The problem is this: Several years ago I took a picture of a fast train while running, a Michigan Central flier, at a point about two miles east of Detroit. On development the plate showed a blur of 1-32 inch, i. e., the pilot did. I used a Vibe extra rapid plate; the focus of the lens was 6 inches; the distance of the engine, the pilot, from the camera, 50 feet; the length of exposure, 1-100 of one second; camera was placed at an angle of 15 deg. with the track. What was the speed of the train? The camera was a Vibe, $4\frac{1}{4} \times 4\frac{1}{4}$, meniscus lens. A. The solution of your problem of the speed of the train is not difficult, at least so far as a sufficiently close approximation is concerned. Start with the fact that the image of the pilot moved 1-32 inch during exposure. Since the lens is 6-inch focus and the pilot is 50 feet away, the pilot moved across the line drawn through the center of the lens, 100 times 1-32 inch, or 3.125 inches, since 50 feet is 100 times 6 inches. And since the camera made an angle of 15 deg. with the track, we must divide the 3.125 inches by the sine of 15 deg. to find the distance the pilot moved during the exposure. This gives 12.07 inches as the distance the train moved in the time of exposure, or 1-100 second. In one second it moved 1,207 inches, or 100 feet 7 inches. This is a speed of somewhat over 71 miles per hour. As we said above, this is an approximate solution, but still not far from the result which an exact solution would give.

(9523) J. S. M. asks: Will you kindly answer in your column of Notes and Queries the inclosed questions relative to Roman computation? I suppose the matter is simple enough, but I have never come across any work explaining it, nor any person whom I have asked who could throw any light on the

subject. A. Very little is known concerning the method by which the Romans used their very inconvenient notation for performing the ordinary calculations. They are supposed to have used the abacus for all except the most simple problems. This instrument is in common use now by all Chinamen, and it is not difficult for any one to see it used wherever these men may be found. A description of the abacus may be had from any encyclopedia. There was a rod for each denomination of numbers to millions, seven rods each carrying five balls. Another set of short rods corresponded to these, and had one ball sliding on each. They could thus count by fives and carry by tens. Other rods supplied their need for calculating ounces. Further than this their business did not require them to go; they never needed to divide the distance of the sun by the velocity of light. They died in total darkness in regard to both of these data of the universe. As we said at the outset, we do not know the detail of the method by which the Romans made their calculations. Their mode of writing numbers was not like ours by placing like denominations in the same column, but each letter had its significance, and each number could be added by itself on the abacus, since each rod meant a denomination.

INDEX OF INVENTIONS

For which Letters Patent of the

United States were Issued


for the Week Ending

January 10, 1905

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Abrading machine, E. L. Buzzell.....	779,584
Abrasive material to metal bodies, fastening, E. G. Case.....	779,630
Acid, making hydrochloric, W. T. Gibbs.....	779,545
Acius, means for elevating, S. Hughes.....	779,853
Adhesives, producing, H. K. Brooks.....	779,583
Agricultural implement riding attachment, N. H. Bloom.....	779,519
Air cooling apparatus, S. C. Davidson.....	779,414
Alkaline solutions of soda chromate, treating, W. T. Gibbs.....	779,705
Amalgamating apparatus, Jean & Schmitt.....	780,002
Amusement, whirlpool for public, J. A. Bruce.....	779,464
Animal clipping machine, C. A. Newberry.....	780,011
Animals, freeing the soil, trees, or plants from harmful, S. Lukacjewsky.....	779,791
Anvil, vise, and drill, combination, J. Weathers.....	779,511
Auger, earth, W. E. Robertson.....	779,968
Automobile, E. R. Hewitt.....	779,477
Bag, bale, etc., tie, G. J. Schuhmacher.....	779,678
Barrel, mason, & Marvil.....	779,862
Barrel, bat, R. C. E. Fucigna.....	779,645
Basket, C. Seitz.....	779,878
Battery, See Electric battery.	
Battery plates, protective covering for storage, A. Meyreth.....	779,553
Battery zinc, F. J. Delavie.....	779,693
Bearing, center, J. C. Barber.....	779,572
Bed, divan folding, W. Thompson.....	779,813
Bedstead and bed bottom, extensible, L. Pieper.....	779,622
Belt conveyer apparatus, T. Robins, Jr.....	779,696
Belt fastener, J. C. Conn.....	779,587
Belt guide, W. C. H. & R. A. Caswell.....	779,767
Bilge block, J. H. Hickley.....	779,649
Bin, gate, R. C. E. Dugan.....	779,590
Binder, loose leaf, Sheridan & Wheeler.....	779,879
Binder reel, R. R. Soberg.....	779,884
Binder, temporary, W. C. Abbott.....	779,681
Blank feeding apparatus, C. B. & C. D. McDonald.....	779,555
Blank holder, G. W. Campbell.....	779,525
Blinds rising by the wind, device for preventing shop window, S. S. Willmott.....	779,827
Blotter, revolving, E. M. Wilson.....	779,679
Boat, sail, J. P. Pool.....	779,440
Bobbin, J. F. Williams.....	779,826
Boller furnace, steam, T. Lennon.....	779,790
Book, bill, M. L. Schultze.....	779,742
Book, blank, J. B. Aichholz.....	779,857
Book, credit coupon, L. P. Rount.....	779,971
Book stack, H. P. Macdonald, Jr.....	779,723
Books, etc., expandable locking clasp for, J. G. Gifford.....	779,922
Boring device, square hole, K. Auerbach.....	779,517
Boring machine, Harker & Alcock.....	779,931
Bottle, antirefilling, L. Kuntz.....	779,611
Bottle, antiseptic feeding, C. W. Tinsling.....	779,749
Bottle closures, machine for applying, Coale & Greensfelder.....	779,991
Bottle nipple holder, nursing, F. C. Brooke.....	779,582
Boyle, non-refillable, O. J. Schinck.....	779,815
Bottle, non-refillable, P. B. T. Berner.....	779,832
Bottle, non-refillable, H. P. Hall.....	780,000
Bottles, apparatus for simultaneously corking a number of, Hyden & Simonson.....	779,544
Bowling alley, P. A. Haberl.....	779,999
Bowling alley, automatic, T. & F. R. McNamara.....	779,494
Box or receptacle, W. R. Comings.....	779,466
Brake hanger, non-chattering, E. H. Scofield.....	779,626
Brake operating mechanism, C. Mawer.....	779,862
Branding apparatus, electric, D. C. Sprecher.....	779,810
Brush holder, C. L. Staver.....	779,814
Bucket, clam shell, G. H. Williams.....	779,512
Buggy boot attachment, C. D. Smith.....	779,565
Buggy top support, E. H. Mason.....	779,725
Bundle carrier, E. M. Comstock.....	779,691
Burglar alarm, O. B. Hanson.....	779,847
Button attachment, A. H. Hope.....	779,478
Button fastener, J. C. Morrison.....	779,864
Cable reel, C. W. Larson.....	779,612
Cake icing machine, W. S. Ivins.....	779,652
Calculating machine driving mechanism, F. C. Rinche.....	779,802
Camera drop-front, J. S. Wright.....	779,897
Camera, panoramic, C. Mills.....	779,956
Can-testing machine, P. Kruse.....	779,719
Canning machine or apparatus, S. J. Dunkley.....	779,537
Candlestick, W. Ferrier.....	779,644
Cane, A. Wagner.....	779,449
Car, P. P. Sturdevant.....	779,818
Car brake mechanism, railway, W. W. Annable.....	779,405
Car coupling, J. A. Hinson.....	779,601
Car coupling, railway, A. Fodor.....	779,472
Car door fastener, Saling & McKiel.....	779,871
Car draft gear, railway, H. M. Pfleger.....	779,559
Car life preserver, railway, W. W. Annable.....	779,404
Car roof, P. H. Murphy.....	779,793
Car spring, railway, S. M. Lillie.....	779,858
Car ventilator, J. E. Armstrong.....	779,755
Cars, etc., bracket stop for street, R. Dunning.....	779,774
Cars or other road vehicles, life guard for electric tram, W. A. & G. A. W. Turner.....	779,448
Carbureter, H. A. Burch.....	779,906
Carpet sweeper, W. D. Hodson.....	779,542
Carriage top box loop, F. A. Neider.....	779,866
Carrier. See Bundle carrier.	

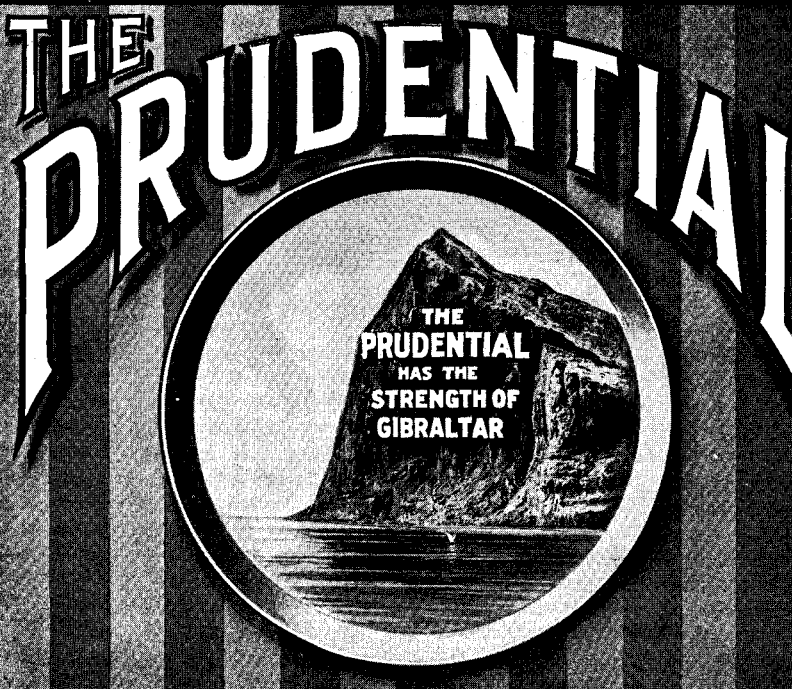

What is Your Wish?

To Leave Your Family Well Off?
To Secure an Income in Old Age?
To Increase Your Business Credit?
To Invest Your Savings Profitably?

Life Insurance in The Prudential may be
made to Provide all These and More.
Write for Book Showing Rates.

THE PRUDENTIAL INSURANCE CO. OF AMERICA

JOHN F. DRYDEN, Pres't.

Dept. 121

Home Office: NEWARK, N. J.



*A
Sign
of
Money*

"Rub it on wood and make it come good."

In by-gone times an itching palm was said to betoken the receipt of money. To-day, the sure sign of money is an advertisement in *Leslie's Weekly* and *Judge*. Large and certain returns result from the use of these money-making mediums.

Leslie's Weekly —the pioneer illustrated news weekly of America. Enters over 100,000 homes every week and is read by all the family. Its columns are clean, instructive and entertaining. A very profitable advertising medium.

Judge —the weekly that makes people laugh. Full of fun, good nature and optimism. Seen everywhere. A great favorite with the general public. Makes mirth for the reader and money for the advertiser.

LESLIE'S WEEKLY,
Fourth Ave. and 19th St., New York City.
W. L. MILLER, Advertising Mgr.

JUDGE,
Fourth Ave. and 19th St., New York City.
WILLET F. COOK, Advertising Mgr.

CHAS. B. NICHOLS, Western Representative, 1313 Hartford Bldg., Chicago.
J. F. STONE, Eastern Representative, 59 Journal Building, Boston.

Cart, hand, M. H. Daley.....	779,913
Cartridge, T. S. King.....	780,003
Cattle guard, O. B. Dillingham.....	779,642
Cattle guard, G. S. Cooper.....	779,909
Cheese cutter centering device, M. B. Irvine.....	779,783
Chuck for holding abrading wheels, H. K. Bacon.....	779,684
Churn, centrifugal, P. A. M. Arnberg.....	779,986
Chute, coal, F. S. Converse.....	779,529
Cigar boxes, combined flap and extension back for, I. Steiner.....	779,676
Cigarette machine, D. J. Campbell.....	779,411
Cigarette machine, P. A. Lawless.....	779,430
Cigarette or cigar mouthpiece, G. P. Butler.....	779,687
Cigarette tip, Strause & Kelmann.....	779,817
Cigarettes or cigars, machine for making and applying mouthpieces to, G. P. Butler.....	779,688
Clutch and brake, friction, F. Kirk.....	779,656
Clutch operating device, pneumatically actuated, A. P. Schmucker.....	779,806
Coal scuttle and sieve, combined, E. J. Tur-lington.....	779,820
Cock, rotary funnel, O. Link.....	779,946
Coffee urn, F. G. Schenck.....	779,740
Coke oven charging machine, J. Haug.....	779,780
Concentrating table shaker, J. Klein.....	779,857
Concrete piles and preparatory piles therefor, forming, C. Shuman.....	779,880
Condenser reversible current apparatus, J. Todd.....	779,889
Conveyor, W. Carr.....	779,465
Conveyor, A. Becchi.....	779,758
Conveyor or carrier, H. D. Conway.....	779,530
Corn chopping machine, C. Scheetz.....	779,625
Corset, E. Calkins.....	779,765
Cotton condenser attachment, Brown & St. Onge.....	779,635
Cotton picker, M. E. Lehmann.....	779,945
Coupling, E. Vogel.....	779,750
Crate, packing, E. G. Quackenbush.....	779,734
Crushing mill, roll, T. L. & T. J. Sturtevant.....	779,566
Cultivator attachment, B. P. Collier.....	779,528
Cultivator for trees, D. Robertson.....	779,870
Current meter, W. S. Blauvelt.....	779,685
Curtain pole, J. Kroder.....	779,788
Cuspidor, M. S. Han.....	779,932
Cutter head dust collector, reciprocating, F. A. Noble.....	779,796
Dauber, fountain, F. D. E. Robbins.....	779,503
Developer and portable dark room, mechanical, Stevenson & Brunner.....	779,748
Dish washing machine, E. Crosby.....	779,641
Dispensing can, T. W. Alexander.....	779,983
Door, air, J. T. Deviese.....	779,534
Door check, C. Ellingen.....	779,917
Draper, J. C. White.....	779,981
Drawing frame, L. W. Penney.....	779,799
Dredge, Henderson & Peake.....	779,782
Drill, See Seed drill.....	779,995
Drill core lifter, diamond, D. Dupuis.....	779,995
Drill machine rake device, J. von Dziembowski.....	779,416
Dust in dust carts, device for distributing, H. Freise.....	779,540
Duster, face and neck, W. T. Hodgen.....	779,936
Dye and making same, anthraquinone, H. Weltz.....	779,825
Dye and making same, violet sulfur, A. Lut-tringhaus.....	779,861
Electric battery, F. P. Dewey.....	779,589
Electric cable coupling, J. J. Dossert.....	779,469
Electric controller, A. Sundh.....	779,447
Electric furnace, D. R. S. Galbraith.....	779,844
Electric machine connection board, dynamo, J. G. Crawford.....	779,532
Electric motor bearing, F. M. V.....	779,822
Electrical wave transmission, D. M. Therrell.....	779,508
Electrode, E. P. Price.....	779,733
Electrolysis, G. Rambaldini.....	779,735
Elevator signal system, B. J. Foley.....	779,592
Embossing machine, hydraulic, J. W. Nelson.....	779,664
Embossing press, S. Curtis.....	779,912
Enamelware, manufacture of, J. F. Kenkel.....	779,655
Engine counterweight attachment, gas, F. J. Miller.....	779,727
Engines, mixing apparatus for explosion or gasoline, E. T. McKalg.....	779,490
Eraser and pencil sharpener, combined, C. Wetzel.....	779,894
Excavating apparatus, Richmond & Debebe.....	779,442
Exhibitor, lace curtain, Swan & Snyder.....	779,507
Explosive, C. E. Bichel.....	779,760
Explosive engine, F. W. Hagar.....	779,778
Eye shield, A. A. Fairbanks.....	779,591
Fabric feeding mechanism, boarded, C. Jack-son.....	779,712
Feed water heater, H. J. Scheubner.....	779,741
Feeder, automatic stock or poultry, H. N. Lyon.....	779,434
Fence, barb wire, F. C. Mosier.....	779,616
File case, P. J. A. Van Deuse.....	780,015
File, paper, J. MacLachlan.....	779,950
Filing machine, T. J. Brough.....	779,836
Filter dam, E. V. R. Gardner.....	779,703
Filter pulp packing machine, K. Kiefer.....	779,548
Filtering apparatus, M. B. Lukens.....	779,850
Filtering apparatus for separating solids from liquids, K. Kiefer.....	779,607
Fire escape, E. M. Bras.....	779,463
Fire escape, J. Moltz.....	779,488
Fire escape, J. H. Leffelman.....	779,550
Fire extinguisher, Murray & Nuhning.....	779,435
Fire extinguisher, H. M. Gillett.....	779,923
Fire lighter, time, J. D. Fulton.....	779,921
Fire shield, P. Wendling.....	779,452
Firearm shoulder protector, C. B. T. Benton.....	779,461
Fireproofing wood, C. Blenio.....	779,700
Fish bait or lure, W. Shakespeare, Jr.....	779,744
Fish line bob, L. J. Holt.....	779,937
Flanged pipe, J. Wood, Jr.....	779,896
Flower holder, P. Gommel.....	779,924
Flue rattler, R. M. Crosby.....	779,468
Fluid compressors, differential governor for, G. Macloskie.....	779,952
Folding chair, C. Mettler.....	780,006
Friction brake, automatic, Sedgwick & Sulli-van.....	780,010
Fulling machine stop motion, W. H. Leavitt.....	779,564
Furnace, E. H. Carroll.....	779,657
Furnace, J. E. Cravath.....	779,412
Furniture base, glass, M. I. Abrams.....	779,467
Garbage burner, F. E. McGurran.....	779,402
Garment, infant's, L. C. Sherick.....	779,960
Gas burner, incandescent, L. R. Hopton.....	779,543
Gas engine, N. W. Traviss.....	779,509
Gas generating apparatus, acetylene, E. R. Cook.....	779,531
Gas generating apparatus, illuminating, F. J. Foveaux.....	779,842
Gas generator, acetylene, E. E. Miller.....	779,726
Gas line safety cut-off, J. G. Armstrong.....	779,460
Gas manufacturing apparatus, P. Eyermaun.....	779,776
Gas producer, J. A. Herriek.....	779,935
Gases, means for utilizing waste furnace, C. L. Cole.....	779,769
Gear, O. L. Haney.....	779,846
Glass plates in store fronts and show cases, fastener for, J. H. Curry.....	779,770
Glassware making apparatus, hollow, E. E. Hoffman.....	779,602
Governor, pumping engine, C. P. McMullen, reissue.....	12,302
Grader, road, W. N. Williams.....	779,513
Grain drier, Morrison & McGrath.....	779,729
Grinding machine, G. Gorton.....	779,646
Grinding wheel, R. Gardner.....	779,419
Grinding wheel, G. Hart.....	779,848
Grindstone sickle support, C. H. Ferguson.....	779,698
Grindstone, convertible tool support for, C. H. Ferguson.....	779,697
Hammer, reciprocating, A. E. Leech.....	779,721
Harness, See Picture frame hanger.....	779,545
Harness hook, I. E. Johnson.....	779,520
Harrow, N. H. Bloom.....	779,834
Harrow tooth fastener, G. F. Blaine.....	779,560
Harrow, wheeled disk, J. H. Price.....	779,965
Harvester, cotton, R. H. Purnell.....	779,831
Hat frame machine, D. D. Beatty.....	779,972
Hay elevator connecting head, Rowland & Bacher.....	779,947
Hay knife, C. E. Lombard.....	779,487
Hay loader, C. F. Mitchell.....	779,487
Hay press feeder, automatic, E. J. Richmond.....	779,736
Heat derived from fuels into energy for utilization, apparatus for converting, B. M. Aslakson.....	779,406
Heel, cushion, F. W. Sharpe.....	779,974

"Star" Foot and Power Screw Cutting Lathes
Automatic Cross Feed
FOR FINE, ACCURATE WORK
Send for Catalogue B.
SENECA FALLS MFG. CO.
695 Water Street,
Seneca Falls, N. Y., U. S. A.

ENGINE & FOOT MACHINE SHOP OUTFITS
LATHES TOOLS & SUPPLIES
CATALOGUE FREE
SEBASTIAN LATHE CO. CINCINNATI, O.

Veeder Counters
to register reciprocating movements or revolutions. Cut full size.
Booklet Free
VEEDER MFG. CO.
Hartford, Conn.
Cyclometers, Odometers, Tachometers, Counters and Fine Castings.

A GOOD INVESTMENT
For \$1.75 we will send by express (not prepaid), complete N. D. Outfit with full instructions for learning
TELEGRAPH OPERATING.
A fascinating study that will enable you to earn good wages. Send for our catalogue. Established 1879.
J. H. BUNNELL & Co., Inc. 20 Park Place New York

The Right Kind of a Motor
on land or water. Salisbury Double Cylinder Motor 4 1/2 x 5. Water Jacket Cylinders and Head, Aluminum Crank Case, Self-Oiling, Nickel Steel Valves, Forged Steel Shaft. Salisbury Motors are Reliable. Prices moderate.
Send for Catalogue.
BUFFALO ENGINE CO., Mfrs.
272-274 Michigan St., Buffalo, N. Y.

THIS GRINDER
Has no pumps, no valves. No piping required to supply it with water. Always ready for use. Simplest in construction, most efficient in operation. Price will interest you.
W. F. & JNO. BARNES CO.,
Established 1879.
1999 Ruby St., Rockford, Ill.

STEEL ROLLS
for flattening wire for all purposes
Send for Catalogue.
BLAKE & JOHNSON,
P. O. Box 7, WATERBURY, CONN.

You Can BUILD IT YOURSELF
We tell you how to do it, show views of machines built at home and many letters from satisfied customers in our new book "How to Make and Save Money with Incubators and Brooders." Full of good things. Invaluable to the beginner. You save half the cost of your incubator. None hatch better. Get the Book and know for yourself.
Channon, Snow & Co., Dept. 196, Quincy, Ill.

This Tool is Polished and Nickel Plated
"You Cannot Stumble at Any Step of the Temple"
in measuring with this combination Triple-Beam Roller Gauge. A great convenience and a labor saver for single, double or triple measurements. \$1.25 each, postpaid
GOODSELL-PRAATT COMPANY Greenfield, Mass.

Send For It To-Day
You'll find it always convenient to have as a useful and instructive book
Montgomery & Co.'s Tool Catalogue
The new edition has 704 pages and is copiously illustrated. Pocket size 6 1/2 x 4 1/2 ins. Sent by mail for 25c.
MONTGOMERY & CO.,
105 Fulton St., New York City.

WOLVERINE
SELF STARTING AND REVERSING
Gasoline Marine Engines
3 to 18 horse power. Launches 18 to 75 ft. Write for catalogue.
WOLVERINE MOTOR WORKS
Grand Rapids, Mich., U. S. A.
Brooklyn office, 97 2nd St.

THE B. F. BARNES
14-INCH DRILL
is adapted for work from 1-16 inch to 3/4 inch. A strong, substantial, well built drill. Plain lever or power feed as desired. We build a full line of Drills. All sizes furnished in Gages. Also have 9-inch, and 11-inch Screw Cutting Lathes, and a 24x2-inch Wet Tool Grinder. Catalog 8 on request.
B. F. BARNES COMPANY, Rockford, Ill.
European Branch, 149 Queen Victoria St., London, E. C.

THE HARRINGTON & KING
PERFORATING CO.
PERFORATED METALS OF EVERY DESCRIPTION FOR ALL USES.
SCREENS OF ALL KINDS.
225 NORTH UNION ST. CHICAGO, ILL.

WILLIAMS' SHAVING STICK

The acme of luxury, convenience and economy.

Williams' Shaving Sticks, Shaving Tablets, Toilet Waters, Toilet Powder, Jersey Cream Toilet Soap.

Write for booklet "How to Shave"

THE J. B. WILLIAMS CO., CLANTONBURY, CONN.

AGENTS

wanted in every locality to represent the Keystone Fire Extinguisher. We offer attractive inducements for permanent, profitable occupation. Previous experience not required. The

KEYSTONE

Fire Extinguisher

has been examined and approved under the standard of the National Board of Fire Underwriters. It sells for \$12.00 (freight allowed east of the Rocky Mountains)—the cheapest and best approved extinguisher on the market. This agency can be carried in addition to other business interests.

Write to-day for full particulars.

JAMES BOYD & BROTHER
18 N. 4th St., Philadelphia

Manufacturers of
FIRE PROTECTION EQUIPMENT
Fire Hose, Hose Couplings, Hose Pipes, etc.

SAVE FIRE LOSS

Seconds count. Be ready at the start with **Badger's Fire Extinguisher** and you can put out any kind of a fire. A request will bring you the information you wish, FREE.

BADGER FIRE EXTINGUISHER CO.
50 Portland St., Boston, Mass.

THOUSANDS are successful and gaining better positions and salaries studying

Electrical Engineering, Steam Engineering, Mechanical Engineering, Mechanical Drawing, Electric Motor, Course, Dynamo, Tender's Course, Telegraphy, Short Electrical Course, Arithmetic, Algebra, by mail. Thomas A. Edison endorses Institute. Text books free. Students helped to positions. Write for free book, "Can I Become An Electrical Engineer?"

ELECTRICAL ENGINEER INSTITUTE
Dept. A, 240 West 23d St., New York

Strength, Safety, Speed, Simplicity

are combined in the highest perfection in the **Mesco Motorcycle Outfit**. It can be attached to any bicycle or tandem and includes 1 1/2 H.P. Motor, choice of any transmission, and all accessories with which to make a complete motorcycle. **Bicycle dealers** attach this outfit and sell your left-over wheels. Price \$75. Write for catalogue and agents' discount.

Motor Bicycle Equipment and Supply Co., BUFFALO, N. Y.

Slotted Armature DISCS

for dynamos and motors, 1 1/2 in. diameter, 12 slots, 25c. per inch. By mail, 35c. Send stamp for sample.

Waltham Model Supply Co.
WALTHAM, MASS.

We will send you, for a free trial in your boilers,

A Dean Boiler Tube Cleaner

to prove that it is the only device that will absolutely remove all the scale from your boilers without inflicting any damage upon the tubes. Write to-day for "Economy in the Boiler Room."

WM. B. PIERCE CO.
319 Washington Street, Buffalo, N. Y.

How To Increase Your Business

READ carefully, every week, the **Business and Personal Wants** column in the **Scientific American**. This week it will be found on page 47. Some week you will be likely to find an inquiry for something that you manufacture or deal in. A prompt reply may bring an order.

Watch it Carefully

Heels and foreparts, shave for boot or shoe, R. J. E. Metzenthin	779,486
Hinge, spring, E. Bommer	779,762
Hog catching and moving trap, G. E. Ringer	779,967
Hog ring, W. F. Richards	779,502
Horseshoe calk, G. F. Hallman	779,596
Horseshoe calk, R. Whitaker	779,597
Horseshoe clip, M. Steed	779,815
Horseshoe, composition, H. Bartley	779,757
Horseshoe, soft tread, P. E. McEwen	779,757
Hub attaching means, J. W. Kovalek	779,482
Hydraulic press, O. Philipp	779,800
Inductance coil, W. C. Fish	798,996
Induction apparatus, high frequency, Spaulding & Austin	779,673
Insect trap, C. F. Smith	779,672
Insulator, F. M. Locke	779,659
Insulator pin, M. M. Wood	779,828
Intrenching tool, C. M. Ransom	779,562
Irrigating head gate, C. W. Seitz	779,973
Jar closure, J. C. Wandell	779,678
Joining machine, overlap, H. Romunder	779,970
Journal box, antifriction, D. Allen	779,403
Knitting machine, circular, H. A. Houseman	779,422
Knob, carriage, J. Hafer, Jr.	779,647
Labeling machine, H. L. Duncan	779,916
Labeling machine, double, J. G. Hendrickson	779,933
Labeling machine, top, J. G. Hendrickson	779,934
Lace making machine, F. A. Schmidt	779,876
Lacing holding clasp, shoe, A. M. Henderson	779,710
Ladder, step, W. M. Anderson	779,829
Lamp, C. C. Malton	779,724
Lamp, H. F. Smith	779,745
Lamp, electric arc, W. C. Fish	779,539
Lamp, electric arc, H. Lux	779,948
Lamp fixture, electric, E. E. Hayward	779,779
Lamp, gas, A. W. Nicholls	779,618
Lampblack from acetylene, making, J. M. Morehead	779,728
Lantern, tubular, F. C. Cannon	779,585
Lantern, tubular, W. T. & F. A. Iddings	779,854
Latch, gate, N. Peterson	779,963
Lifting jack, J. C. Blevney	779,577
Lifting jack, E. Wustner	779,633
Linotype machine, J. R. Rogers	779,969
Liquid elevating apparatus, S. Hughes	779,941
Liquid raising process, Young & Shaw	779,456
Liquid separator, centrifugal, A. T. Salenius	779,445
Liquid separator, centrifugal, A. L. Christenson	779,990
Loading device, W. H. Fern	779,699
Loading or unloading machine, J. McMyler	779,493
Lock, J. Greenberg	779,594
Lock, H. Barry	779,899
Loom, J. R. Pitton	779,997
Loom bobbin receptacle, automatic, M. L. Stone	779,628
Loom filling fork, R. Riley	779,966
Loom picker check, S. H. Bevil	779,902
Loom shuttle motion, J. & A. Mann	779,484
Loom warp thread holder, H. Lee	779,944
Lubricating device, J. V. Clark	779,690
Lubricator, Knipper & Mackaye	779,609
Lubricator drop feed, E. D. Marvin	779,792
Magnet, polyphase, D. L. Lindquist	779,432
Mail bag fastening, C. B. Stevens	779,747
Mail catcher and receiver, Long & Gorton	779,722
Mail collecting and distributing pouch, E. M. Letts	779,551
Mailing card, coin, J. Kettelman	779,715
Manure spreader, J. S. Kemp	779,714
Match box, J. F. W. Kuehn	779,610
Match composition, H. Staier	779,674
Match holder and striker, E. A. Parker	779,495
Match safe, self-igniting, S. A. Tescher	779,629
Mattress, B. F. Berryman	779,576
Measure, test, B. Simpson	779,882
Measuring instrument shunt, electrical, L. T. Robinson	779,737
Mechanical movement, A. Wahle	779,451
Mechanical movement, F. C. Northrup	779,556
Medicated sweetmeat, Bjornstad & Stacey	779,833
Metal working machine, electromagnetic, F. W. Jessop	779,427
Meter, See Current meter	
Milk cooler, J. W. & C. W. Walkup	779,823
Mine shaft safety device, N. W. Dickerson	779,535
Molding machine, W. J. Sterling	779,976
Mortising machine, A. W. Miller	779,977
Motion transmitting mechanism, rotary, J. S. Kemp	779,713
Motor, C. Fero, Sr.	779,538
Mower, lawn, J. I. Kunkle	779,429
Mowers, reapers, etc., cutting apparatus for, J. Downing	779,994
Mowing machine attachment, A. K. Rarey	780,014
Muffler, G. S. Troost	779,510
Music rack, Buck & Ogden	779,905
Musical instruments, pneumatic action for, E. de Kleist	779,710
Musical instruments, tracker for mechanical, R. W. Pain	779,867
Nail puller, H. L. Fish	779,919
Neck stall, A. J. Griffith	779,927
Neckwear holder, J. Weil	779,631
Note sheet, F. Taft	779,677
Nozzle and spreader, combined flushing, J. H. Bormann	779,904
Nursery stock puller, M. P. Allen	779,984
Nut lock, W. B. Wolf	779,632
Nut lock, C. D. Campbell	779,766
Nut shells, machine for cutting, J. H. Gruner	779,474
Oil as fuel, means for the utilization of crude, J. O. Alwood	779,985
Oil can, G. Palm	779,798
Oil cup, McGinty & Huber	779,959
Oil from water, apparatus for separating, W. J. McKnight	779,492
Oil wick burner, M. P. Allen	779,515
Ornaments, manufacturing cloth covered, A. M. Holstein	779,651
Oven, baker's, E. Kaiser	779,428
Packing, adjustable turbine, A. R. Dodge	779,771
Packing and shipping case, H. A. Penrose	779,621
Packing, elastic fluid turbine, O. Junggren	779,785
Packing, metallic, T. A. Johnston	779,480
Packing, piston rod, C. P. Fogh	779,700
Paint and producing same, R. Warnock	779,752
Paint and producing same, W. A. Hall	780,001
Paper clip, G. J. Borsnan	779,522
Paper feeding machines, sheet caliper device for, Dexter & Hallstream	779,914
Paper feeding mechanism, C. A. Juengst	779,784
Pasting mechanism, P. A. Lawless	780,004
Pen, fountain, J. H. Crowell	779,692
Pen reservoir attachment, H. Tartsch	779,567
Pew, extensible, J. P. Kline	779,718
Photographic plates, prints, or films, apparatus for washing or otherwise treating, J. B. S. MacIlwaine	779,483
Photographic shutter, E. V. Pierce	779,605
Photographs or pictures for producing animated effects, apparatus for displaying series of, J. Mason	779,954
Pick, J. Chevallard	779,839
Picker check, C. H. Buckley	779,636
Picture frame hanger, J. A. Long	779,433
Pictures by means of catalysis, reproducing, Ostwald & Gros	779,797
Pipe coupling, W. P. Powell	779,479
Pipe or casing puller, S. W. Munn	779,660
Planter, corn, E. E. Levig	779,552
Planter, corn, W. S. Graham	779,925
Planter dropping mechanism, corn, R. S. Kirkpatrick	779,608
Plastic block machine, A. Evenstad	779,775
Plastic materials, manufacturing decorative articles from, J. Walter	779,979
Plow gate, B. W. Grice	779,926
Pneumatic despatch apparatus carrier, C. H. Burton	779,638
Pocket device for garments, detachable, R. D. Yates	779,898
Poison for rodents, S. W. Allen	779,634
Polyphase winding, B. A. Behrend	779,575
Pontoon for lifting loaded ships, A. C. A. Holzapfel	779,852
Powder can, S. Rohrer	779,667
Power transmitter, Ough & Waltenbaugh	779,620
Printing apparatus, L. M. Todd	779,570
Propeller, C. T. Freid	779,473
Puff comb, R. H. Damon	779,413
Puller, See Nail puller	
Pump, B. W. Rice	779,499
Pump, D. L. Shaffer	779,743
Pump, electric, E. F. Porter	779,623
Pump measuring device, fluid, W. J. Rusinger	779,989

"Raffles" Gentleman Burglar

Raffles, the prince of professional cracksmen, finds no safer place for his enormous chest, laden with the heavy silver from many a plunder, than the vaults at the bank.

Bunny, his confederate, deposits the chest. In less than twenty-four hours the vaults are entered and robbed.

Bunny withdraws the chest only to find that the bank robber has used it as a hiding-place for his ill-gotten gains.

This tale of a daring robbery, "The Chest of Silver," will be found in the January 21st issue of

At all
News Stands

Collier's

ten cents
the copy

THE EQUITABLE

HENRY B. HYDE
FOUNDER

JANUARY · 1905

DECEMBER · 1904

STRONGEST IN THE WORLD

J. W. ALEXANDER
PRESIDENT

J. H. HYDE
VICE PRESIDENT

DON'T

let another year pass away without giving to your family the protection that life assurance alone can give.

By means of an Endowment Policy in the Equitable you can not only give them this protection but at the same time provide for your own maturer years.

Send coupon below, for particulars.

Splendid opportunities for men of character to act as representatives
Write to GAGE E. TARBELL 2nd Vice President

The Equitable Life Assurance Society of the United States, 120 Broadway, New York, Dept. 29

Please send me information regarding an Endowment policy for \$.....

if issued at..... years of age.

Name.....

Address.....

Hydrozone

Cures Sore Throat

A Harmless Antiseptic.

Endorsed by the medical profession. Send ten cents to pay postage on free trial bottle. Sold by Leading Druggists. Not genuine unless label bears my signature:

Prof. Charles Marchand

Dept. U, 63 Prince St., N. Y.

Write for free booklet on Rational Treatment of Disease.



LE PAGE'S GLUE STRONGEST IN THE WORLD. Does not set quickly like the old style glue, and has four times the strength (Official test, 1 in. sq. hard pine butted, registered 1620 lbs. before parting). Used by the best mechanics and mfrs. the world over. Invaluable in household use, for Furniture, China, Ivory, Books, Leather, and wherever a strong adhesive is desired. 1 oz. bottle or collapsible self-sealing tube (retails 10c.) mailed for 12c. if your dealer hasn't our line. **LE PAGE'S PHOTO PASTE**, 2 oz. size retails 5c.; by mail, 10c. **LE PAGE'S MUCILAGE**, 2 oz. size retails 5c.; by mail, 10c. **RUSSIA CEMENT CO., 139 Essex Ave., Gloucester, Mass.**

SHOEMAKER'S BOOK



on POULTRY and almanac for 1905, contains 224 pages, with many fine colored plates of fowls true to life. Tells all about chickens, their care, diseases and remedies. All about INCUBATORS and how to operate them. All about poultry houses and how to build them. It's really an encyclopedia of chicken-dom. You need it. Price only 15c. **C. C. SHOEMAKER, Box 900, FREEPORT, ILL.**



BIG PROFITS IN POULTRY.

A city lot is large enough, and the **CYPHERS INCUBATOR** makes hatching certain. Used on and endorsed by 42 Government Experiment Stations. Complete catalog and poultry guide, 212 pages (8x11 inches), free if you mention this paper. Address nearest office. **Cyphers Incubator Co., Buffalo, N. Y.** Boston, Chicago, New York, Kansas City, San Francisco

"The Kobinoor in California's crown."

MOUNT SHASTA

There is no more beautiful sight of its kind than Mount Shasta, covered with snow and glistening in the sun. Thousands have traveled across the continent to see it, and felt well repaid for their time. The way to reach it is by the

NEW YORK CENTRAL LINES

and their connections. Mount Shasta is only about four and a half days from New York or Boston, and every lover of this country should see it.

For details of rates and trains, see a ticket agent of the New York Central.

A copy of "America's Winter Resorts" will be sent free on receipt of a postage stamp by George H. Daniels, General Passenger Agent, New York Central & Hudson River Railroad, Grand Central Station, New York.

Instructive Scientific Papers ON TIMELY TOPICS

Price 10 Cents each by mail

ARTIFICIAL STONE. By L. P. Ford. A paper of immense practical value to the architect and builder. SCIENTIFIC AMERICAN SUPPLEMENT 1500.

THE SHRINKAGE AND WARPING OF TIMBER. By Harold Busbridge. An excellent presentation of modern views; fully illustrated. SCIENTIFIC AMERICAN SUPPLEMENT 1500.

CONSTRUCTION OF AN INDICATING OR RECORDING THERMOPHOTOGRAPHIC BAROMETER. By N. Monroe Hopkins. Fully illustrated. SCIENTIFIC AMERICAN SUPPLEMENT 1500.

DIRECT-VISION SPECTROSCOPES. By T. H. Blakesley, M.A. An admirably written, instructive and copiously illustrated article. SCIENTIFIC AMERICAN SUPPLEMENT No. 1493.

HOME MADE DYNAMOS. SCIENTIFIC AMERICAN SUPPLEMENTS 161 and 600 contain excellent articles with full drawings.

PLATING DYNAMOS. SCIENTIFIC AMERICAN SUPPLEMENTS 720 and 793 describe their construction so clearly that any amateur can make them.

DYNAMO AND MOTOR COMBINED. Fully described and illustrated in SCIENTIFIC AMERICAN SUPPLEMENTS 844 and 865. The machines can be run either as dynamos or motors.


ELECTRICAL MOTORS. Their Construction at Home. SCIENTIFIC AMERICAN SUPPLEMENTS 759, 761, 767, 641.

Price 10 Cents each, by mail

Order through your newsdealer or from

MUNN & COMPANY
361 Broadway New York

Pump, motor air, E. Cheshire	779,907
Pump, oil, Clark & Blynt	779,689
Puzzle, W. H. Nichols	779,438
Puzzle, G. J. Maringer	779,861
Puzzle, C. H. Saunders	779,874
Pyrographic tool, H. Holton	779,938
Pyrotechnic device, F. T. Beck	779,901
Rack, J. H. Varty	779,821
Rail joint, J. A. McKelvey	779,491
Rail joint chair, J. L. McGhee	779,958
Rail protective device, third, Ryan & Gunter	779,739
Railway cattle guard gate, W. D. Hudgings	779,603
Railway construction, slot switch tongue and slot switch-box mechanism for conduit, H. C. Stiff	779,506
Railway crossing, continuous rail, A. Campbell	779,410
Railway rail and chair combined, C. A. Gilchrist	779,706
Railway rail fastening, R. G. Musgrove	779,617
Railway rail joint, C. A. Gilchrist	779,707
Railway signaling circuit, A. J. Wilson	779,895
Railway switch, H. Elliot	779,695
Railway tie, metallic, H. W. Avery	779,756
Railway track, J. W. Porter	779,964
Railway track structure, G. M. Ervin	779,471
Railway track structures, plate fastening for, G. M. Ervin	779,470
Railway track switch, electric, G. H. Fretts	779,920
Railway transfer, street, F. Riordan	779,869
Railways, system of electrical distribution for electric, J. H. Hallberg	779,475
Razor guard, E. P. Brewer	779,580
Reflecting and directing light, device for, H. P. Roberts	779,563
Refrigerator fastening, N. Leighton	779,789
Refrigerators, etc., overflow alarm or indicator for, N. Bosmann	779,462
Rheostat, automatic motor starting, Schattner & Haskins	779,875
Riveting machine, J. W. Nelson	779,662
Roadway surface composition, Jones & Meahan	779,604
Roasting furnace, F. Klepetko	779,717
Roof bracket, T. H. Kingston	779,481
Rotary engine, L. G. Bartlett	779,643
Rotary explosive engine, Farnell & Coryell	779,013
Roundabout, J. M. Taylor	779,508
Rubber plants, process of and apparatus for the separation and recovery of gum from, F. Ephraim	779,696
Sack closing grapple, S. Loe	779,614
Safe, Brenner & Allen	779,579
Sand washing and saving machine, W. B. Martin	779,615
Sanding or polishing machine, F. Urban	779,630
Sash, reversible window, A. Iske	779,426
Sash, self-closing window, C. D. Pruden	779,801
Sawmill carriage, J. O. Willard	779,454
Scale attachment, J. C. Dixon	779,643
Scale, beer, F. F. Carmody	779,638
Scale, cream test, W. H. Sargent	779,873
Scale making machine, P. F. Cohen	779,768
Scale, weighing, W. H. Sargent	779,872
Scale weight indicator, weighing, D. F. Curtin	779,993
Scales, relieving gear for railway, J. P. Newell	779,732
Scissors, A. M. Minter	779,957
Scraper, I. B. Hammond	779,648
Sea light, intermittent, G. Rocco	779,803
Seed drill, disk, B. Ambrose	779,571
Sewing machine, A. Tetraault	779,569
Sewing machine attachment for producing drapery cords, C. A. Burns	779,764
Shade and curtain bracket, adjustable, O. A. Lee	780,005
Shaft, flexible, R. Shedenhelm	779,669
Sharpening the knives of guillotine cutting machines, apparatus for, A. V. Brown	779,837
Sheet feeding machine, J. E. Smyth	779,975
Sheet metal plate, G. H. Stewart	779,887
Sheller feeders, means for adjusting, C. E. Armstrong	779,459
Shipping case, H. A. Penrose	779,556
Shovel, W. S. Judd	779,546
Shovels, making, W. S. Judd	779,547
Sieve adjuster, D. H. Houser	779,424
Signaling system, selective, W. D. Watkins	779,893
Silver emulsions, producing, J. Gaedcke	779,777
Siphon, P. McGrath	779,865
Skate, P. W. Finkle	779,417
Smelting furnace, A. E. Manchester	779,953
Smoking pipe, G. B. N. Dow	779,694
Snap hook, J. B. Steele	779,675
Snap hook, H. H. Uley	779,800
Snatch block, G. Nettle	779,437
Soap holder, washboard, L. L. Barton	779,987
Soldering, G. H. Stewart	779,886
Soldering furnace burner, E. T. Burgess	779,523
Soldering machine, can cap, A. Cerruti	779,526
Sole, shoe, W. B. Arnold	779,683
Speculum, C. F. Spangler	779,885
Speed indicator, rotary, G. Saaler	779,624
Spindle and bearing, T. A. Boyd	779,835
Spring, See Car spring	
Stamp mill mortar, M. P. Boss	779,521
Staple setting implement, F. Wiseman	779,680
Starch, making nitrated, F. B. Holmes	779,421
Steam gage, bourdon, W. I. Staaf	779,812
Steel, cutting self-hardening, J. Armstrong	779,516
Steel-hardening machine, J. W. Faessler	779,841
Steering boats, means for, J. E. Nicholson	779,961
Sterilizing apparatus, A. T. Pfeiff	779,498
Sterilizing organic substances, C. C. L. G. Budde	779,637
Stirrup, J. B. Hayden	779,476
Stock yard chute pen, A. G. Leonard	779,658
Stool seat, piano, P. F. Holtzman	779,851
Structural block, C. F. Linscott	779,613
Sugar bearing materials, treatment of, C. Steffen	779,816
Support, adjustable, O. C. White	779,453
Sweeper, floor, Dunaway & Melander	779,773
Tableau igniting machine, S. M. Gorham	779,593
Tag, umbrella, H. Cain	779,409
Telegraph and telephone transmission line, E. F. Roerber	779,443
Telegraph system, H. Shoemaker	779,670
Telegraph system, printing, J. Barry	779,524
Telephone bracket, S. J. Seifried	779,504
Telephone receiver, support, F. P. Howe	779,040
Telephone selecting system, W. D. Watkins	779,892
Telephone system, party line, W. W. Dean	779,533
Telephone system, selective, P. J. Albrecht	779,982
Telephone system, selective party line, A. J. Springborn	779,811
Telephone trunk line apparatus, W. O. Penell	779,497
Tent, E. I. Rice	779,500
Tent cottage, C. Schram	779,446
Thread separator, E. C. Reiter	779,868
Threshing machine, G. Anderson	779,458
Threshing machine band cutter and feeder, J. Hammond	779,708
Threshing machine beater, J. Hovey	779,939
Threshing machine feeding mechanism, automatic, E. P. Killinger	779,855
Threshing machine separator attachment, J. Schultz	779,808
Ticket issuing and recording machine, Ohmer & Bridenbaugh	779,557
Ticket or check holder, W. T. Willits	779,455
Tile for floors, walls, etc., combination, Dickey & Derry	779,536
Tiling, imitation, J. Singer	779,883
Time recorder, A. N. Palmer	780,012
Tire coupling, M. M. Artman	779,830
Tire cover, F. E. Bowers	779,578
Tire, pneumatic, B. C. Rowell	779,444
Tire, pneumatic vehicle, S. W. Fuller	779,702
Tire, vehicle, C. Stein	779,505
Tire, vehicle, J. Neary	779,730
Tire, wheel, J. S. Cushing	779,588
Tobacco stemming machine, L. P. Whitake	779,980
Tongue support, J. C. Oard	779,439
Tool, pneumatic, H. G. Kotten	779,787
Tooth, artificial, R. E. Payne	779,496
Torpedo, W. E. Matthew	779,485
Track construction, concrete, H. B. Nichols	779,795
Trenching machine, L. A. Desy	779,415
Trolley bridge, R. T. McCarroll	779,554
Trolley device, Reese & Weitzel	779,441
Trolley for electric railways, G. C. Hohein	779,850
Trolley retriever, E. J. Jonas	779,654
Trolley wire suspension device, T. P. Chandler	779,640



8 REASONS WHY THE Locomobile

is Easily the Best Built Car in America

1. Standard design; no freak features. 2. Result of long experience on proper lines. 3. Special material for each part. 4. All material analyzed. 5. Forgings instead of castings. 6. Every part interchangeable. 7. Careful attention to minute details. 8. Convenience of the customer considered at every point.

Locomobile Co.
Bridgeport, Conn.



WE CAN
SAVE YOU
25 TO 75%

ON TYPEWRITERS of all makes

Send for samples of writing, prices, and catalogue. Machines shipped for inspection.

NEW YORK: 1 1/2 Barclay St.
BOSTON: 38 Bromfield St.
CHICAGO: 134 La Salle St.
KANSAS CITY: 817 Wyandotte St.
ST. LOUIS: 209 North 9th St.
SAN FRANCISCO: 536 California St.

THE TYPEWRITER EXCHANGE

THE SORTIE of the RUSSIAN FLEET

from Port Arthur on August 10, 1904, is discussed by a naval expert in SCIENTIFIC AMERICAN SUPPLEMENT, 1513; price 10 cents by mail. Diagrams and photographs showing the damage sustained by the Russian ships are published. Order from your newsdealer or from

MUNN & CO., 361 BROADWAY, NEW YORK


JUST PUBLISHED

American Estates and Gardens

4to. 11x13 1/2 inches. Illuminated Cover and
275 Illustrations. 340 Pages. Price, \$10.00

By BARR FERREE

Editor of Scientific American Building Monthly, Corresponding Member
of the American Institute of Architects and of the Royal
Institute of British Architects

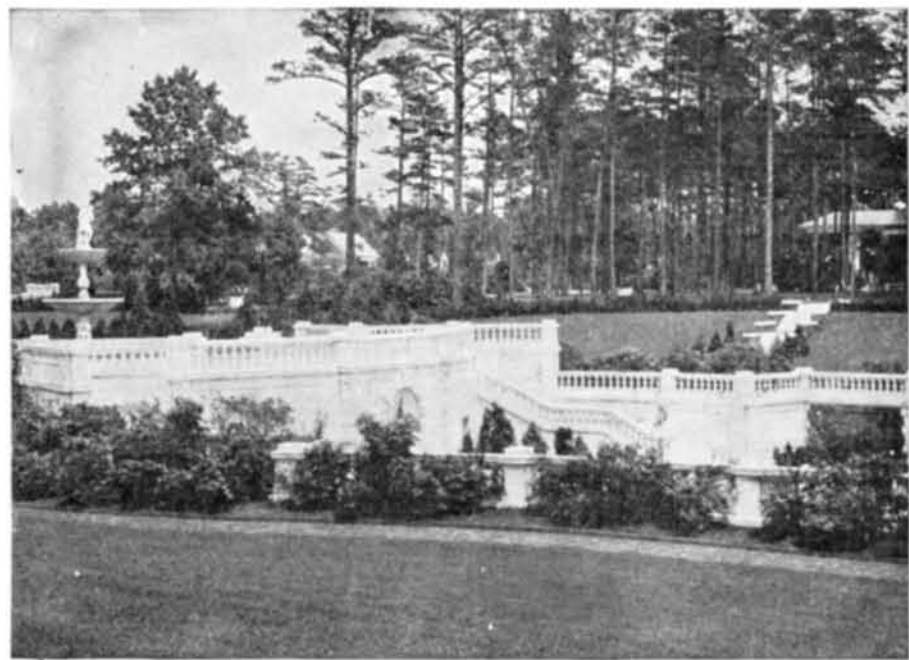

A SUMPTUOUS book dealing with some of the most stately houses and charming gardens in America. The illustrations are in nearly all cases made from original photographs, and are beautifully printed on double coated paper. Attractively bound. This book will prove one of the most interesting books of the season, and will fill the wants of those who desire to purchase a luxurious book on our American homes. An illustrated prospectus mailed free on request.


MUNN & COMPANY

Subscription Dept., O.O.

Publishers of
"Scientific American"

337 Broadway, New York

The Science of the LINDSAY LIGHT



Here it is, so plainly illustrated that anyone can readily see why the Lindsay Light produces more light and better light from a less amount of gas than would be burned in the same time by an ordinary incandescent gas burner.

Note the tapered tube burner; the heated air chamber; the air draft which heats the gas before it strikes the flame, causing perfect combustion.

The Lindsay Light gives a forced pressure that sends the flame clear out to the end of the mantle, making it all incandescent—all light giving. It regulates the pressure of any gas system, allowing no waste from over pressure. The Lindsay Light mantle gives out a strong, white, brilliant light of 800 candle power.

In two months and six days one Lindsay Light will save its cost in gas.

Best dealers everywhere sell them. If not obtainable at dealers, sent prepaid \$1.25. The installation of Lindsay Lights will not only save money, but eyesight, as the light is soothing and restful. Write for FREE Illustrated Book and Full Particulars.

LINDSAY LIGHT COMPANY CHICAGO

The most careful farmers and gardeners everywhere place confidence in Ferry's Seeds—the kind that never fail.

FERRY'S SEEDS

have been the standard for 49 years. They are not an experiment. Sold by all dealers. 1905 Seed Annual, free for the asking.

D. M. FERRY & CO.,
Detroit, Mich.

ELECTRIC AUTOMOBILE. — DIRECTIONS. With many illustrations, for making a complete machine from two bicycles are given in SUPPLEMENT No. 1195. The motor and battery are also treated of in detail. Price 10 cents. For sale by Munn & Co. and all newsdealers.

WINTER CRUISES to the WEST INDIES

Delightful Mid-Winter Cruises
BY THE
Palatial Twin-Screw Cruising Steamer
"Prinzessin Victoria Luise"
To the WEST INDIES

Leaving New York February 2d and March 7th, 1905, duration from 24 to 28 days. Covering the picturesque islands of the Caribbean Sea, including Nassau, Cuba (Santiago and Havana), Jamaica (Kingston), Porto Rico (San Juan), St. Thomas, Barbados (Bridgetown), Trinidad (Port of Spain, Pitch Lake), Martinique (Fort de France, St. Pierre, Mt. Pelee), Venezuela (La Guayra, Caracas, Valencia, Puerto Cabello), Curacao and Bermuda, Hamilton.

These cruises should appeal to all lovers of winter cruises under such splendid conditions. Send for handsome illustrated book, which tells of this and other attractive cruises.

Hamburg American Line
37 BROADWAY, NEW YORK
Agencies in all Principal Cities

50 Years' Experience

PATENTS

Trade Marks, Designs, Copyrights, Etc.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. Handbook on Patents sent free. Oldest agency for securing patents. Patents taken through MUNN & CO. receive Special Notice, without charge, in the

Scientific American

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, \$3 a year; four months, \$1. Sold by all newsdealers.

MUNN & CO. 361 Broadway, New York
Branch Office 25 E. St. Washington, D. C.

Trousers, R. Rochmill	779,738
Truck, car, J. C. Barber	779,574
Truck, hand, E. J. Bryan	779,988
Trunk, C. H. Richards	779,501
Tug, shaft, J. M. Peyton	780,016
Tumbling drum, W. R. Smith	779,749
Turbine bucket support, intermediate, A. F. Macdonald	779,949
Turbine, elastic fluid, C. G. Curtis	779,910
Typewriter, H. Bates	779,518
Typewriter carriage, B. T. Bruce	779,408
Typewriter ribbon holder, S. P. Doane	779,915
Typewriter type bar bearing, L. Myers	779,436
Typewriting machine, A. T. Brown	779,407
Typewriting machine, C. W. Howell	779,425
Typewriting machine, O. C. Kave	779,942
Typewriting machine, E. B. Cram	779,992
Universal joint, P. E. Bocorselski	779,903
Valve, W. H. Kilbourn	779,786
Valve, air, water, and vacuum, O. C. Hatch	779,599
Valve for air and water, automatic drainage, W. T. Donnelly	779,772
Valve for air brakes, automatic retaining and recharging, C. B. Harrington	779,598
Valve for intermediate stages of turbines, Emmet & Junggren	779,840
Valve, gravity, J. F. McCanna	779,601
Vehicle, J. E. Armstrong	779,686
Vehicle bow-bending machine, P. R. Brown	779,754
Vehicle brake, E. M. Winters	779,781
Vehicle detector attachment, H. Hencken	779,418
Vehicle, motor, C. E. Foster	779,418
Vehicle storm front, H. D. Pursell	779,781
Vehicle storm shield, folding, C. M. Harvey	779,849
Vehicle wheel, W. H. Schofield	779,807
Vehicle wheel, C. R. S. J. Halle	779,920
Vehicle wheel spring fork, C. O. Hedstrom	779,709
Vending machine, coin-controlled, W. H. Walter	779,824
Ventilator, See Car ventilator	
Ventilator, S. H. Jacobson	779,653
Voltage regulator, O. M. Lacey	779,720
Wagon, H. Rodenhausen	779,804
Wagon box, C. B. W. Smith	779,627
Wagon, coasting, H. F. Keyes	779,606
Wagon, dump, Van Wagenen & Sweet	779,891
Wagon, dumping, J. F. Clark	779,908
Warp float cutting machine, G. H. Boynton	779,763
Washbottle, J. E. Faucett	779,818
Washing machine, Garver & Lauer	779,704
Washing machine, E. J. Kilmurry	779,856
Washer, H. M. Waitt	779,751
Watch protector, R. A. Thratt	779,888
Water cooler, L. H. Brinkman	779,581
Water elevating device, G. K. Osborn	779,619
Water elevating device, V. P. Hammer	779,845
Water head gate, F. D. Giddings	779,541
Water heater, R. Hoffman	779,420
Water heater automatic shut off, R. Hoffman	779,711
Water wheel, T. R. Timby	779,978
Wax emulsion and producing same, H. H. Church	779,527
Weaner, calf, C. W. Erick	779,701
Weighing machine, automatic, G. J. Hicks	779,649
Well drilling machine, F. E. Simpkins	779,671
Wheat cleaning and scouring machine, M. A. Griffin	779,595
Windmill wind wheel, O. J. Ziegler	779,514
Window or door alarm, automatic, J. Wagner	779,450
Window strip, R. R. Lee	779,549
Wine cooling device, P. P. Nobis	779,082
Wrench, M. C. Morrison	779,489
Yarn drying apparatus, Berry & Woodward	779,759

DESIGNS.

Fringe, J. C. Atkinson	37,291
Trimming, C. Seidel	37,293

TRADE MARKS.

Cards, playing, R. Freeman	43,987
Cigars, stogies, cheroots, and smoking tobacco, H. P. Strause	43,989
Cleansing and polishing preparations, certain named, Columbia Refining Co.	43,994
Coal, cannel, Mahoning & Lake Erie Coal Co.	43,999
Flour, wheat, Phoenix Mill Co.	43,991
Ice cream, H. C. Gertz	43,990
Leathers, certain named mechanical, E. F. Houghton & Co.	43,988
Medical compounds for certain named diseases, L. L. Hill	43,993
Razor hones, sharpening stones, and sharpening wheels, F. Swaty	43,997
Remedial agent for the treatment of lung and nasal diseases, Somnolia Medicated Pillow Co.	43,992
Roofing material, certain named asphalt, Asphalt Roofing Co.	43,995
Slate products, certain named, J. A. Qualey	43,996
Steel, certain named, J. Beardsaw & Son	43,998

LABELS.

"Atlas," for mantles, Cluster Gas Light Co.	11,798
"Crasper's Easy Workers," for a cathartic medicine, M. L. Crasper Co.	11,791
"Frankfort Distillery," for whiskey, Frankfort Distillery	11,781
"Frenzied Finance," for educational cards, G. R. Taylor	11,793
"Hammond Public Library," for cigars, Liesenfelt Bros.	11,785
"Hoffman's Life Preserver," for a hair tonic and dandruff cure, R. H. Hoffman	11,787
"Korn Flour," for flour, H. Hunter	11,786
"Lion Brand," for ladders, F. Tetterborn	11,799
"Locion Higienica De Eucaliptus," for a medicinal preparation for the preservation of the hair, Ruiz y Roca	11,790
"Medial Script Sentence Builder," for educational cards, Milton Bradley Co.	11,795
"Medial Script Word Builder," for educational cards, Milton Bradley Co.	11,794
"My Prima Havana," for cigars, W. Edelstein	11,782
"Old Timers," for cigars, C. Fleischmann	11,783
"Table Builder No. 1," for educational cards, Milton Bradley Co.	11,796
"Table Builder No. 2," for educational cards, Milton Bradley Co.	11,797
"Taka Tonic," for a proprietary medicine, Taka Tonic Co.	11,792
"Waterloo Cigars," for cigars, M. A. Pacella	11,784
"Windsor Castle Ties," for ties, I. Isaac & Co.	11,780

PRINTS.

"Blue Ribbon," for beer, A. von Cotzhausen	1,180
"McKinley Tea," for a medicine, C. O. Larter	1,181
"Reedy's Cylinders," for cylinders, J. W. Reedy Elevator Manufacturing Co.	1,182
"Snow White Marble Bleach," for marble bleach, H. A. Eberhardt	1,183
"Steffen-Bretch Ice and Ice Cream Company," for ice cream, Steffen-Bretch Ice and Ice Cream Co.	1,179

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address Munn & Co., 361 Broadway, New York.

DON'T BUY GASOLINE ENGINES

UNTIL YOU INVESTIGATE "THE MASTER WORKMAN," a two-cylinder gasoline engine superior to all one cylinder engines; revolutionizing gas power. Costs Less to Buy and Less to Run. Quickly, easily started. No vibration. Can be mounted on any wagon at small cost—portable, stationary or traction. Mention this paper. SEND FOR CATALOGUE. THE TRIPLE PUMP CO., Mfrs., Meagher & 15th Sts., Chicago, THIS IS OUR FIFTY-FIRST YEAR.

SPECIAL MANUFACTURING. DIES AND STAMPINGS TO ORDER.
SPECIAL MACHINERY—MODELS—EXPERIMENTAL WORK.
DROP FORGING DIES AND DROP FORGINGS.
HARDWARE SPECIALTIES ETC. MANAGED TO ORDER. SEND SAMPLES OR DRAWINGS FOR ESTIMATES. WRITE FOR OUR BOOKLET.
THE GLOBE MACHINE & STAMPING CO.
970 HAMILTON ST., CLEVELAND, OHIO.

ICE MACHINES. Corliss Engines, Brewers' and Bottlers' Machinery. THE VILTER MFG. CO., 899 Clinton St., Milwaukee, Wis.

CHEMICAL EXAMINATIONS OF ALL KINDS.
DR. H. C. STIEFEL, Bissell Block, Pittsburgh, Pa.

MODELS & GEARS. CATALOGUES FREE. UNION MODEL WORKS 193 CLARK CHICAGO.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery. E. V. BILLAARD, Fox Bldg., Franklin Square, New York.

The Loomis Automobile & Marine Specialties Known the world over for efficiency and durability. Carburetors, Mufflers and Circulating Pumps. LOOMIS AUTOCAR CO., Westfield, Mass., U. S. A.

MODEL AND EXPERIMENTAL WORK. Electrical and Mechanical Instruments. Small Mach'y. EDWARD KLEINSCHMIDT, 82 W. Broadway, New York

Dies, Tools and Special Machinery. Models and Experimental Work. General Machine Work. PE. J. BENDER & SONS, Inc., 57 Frankfort St., New York

DRYING MACHINES. S. E. WORRELL Hannibal, Mo.

Dies, Tools, Models and Special Machinery. Metal Specialties and Stampings Manufactured. MOFFET & MOORE, CHICAGO, U. S. A. OFFICE: 641 Fifth Avenue WORKS: INDIANA & FRANKLIN STREETS

Model Machinery and Experimental Work. W. H. CRAWFORD 194 Broadway, New York City.

Cement Books. How to use Portland Cement, 50c.; Portland Cement Sidewalk Construction, 50c. Cement and Engineering News, 164 La Salle St., Chicago

MODELS & CHICAGO MODEL WORKS ESTABLISHED 1867 738 E. MADISON ST. CHICAGO, ILL. WRITE FOR CATALOGUE OF MODEL SUPPLIES

INVENTORS We manufacture METAL SPECIALTIES of all kinds, to order; largest equipment; lowest prices. Send sample or model for low estimate and best expert advice FREE THE EAGLE TOOL CO. Dept. A, Cin'ti, O

PRINTING THAT BRINGS RESULTS PAYS YOU

WE attend to every detail of Writing, Illustrating, Printing and Binding Booklets. Inventors and manufacturers wishing to sell or exploit their patents can do it very effectively by good circulars and booklets. Estimates furnished. Send 8c. postage for samples and handsome souvenir engraving of St. Louis Exposition, 14x20. on 20x24 paper. C. L. WRIGHT & CO., 132-4-6 West 14th Street, New York.



A SPECIAL Automobile NUMBER

OF THE
Scientific American

WILL ISSUE ON

JANUARY 28, 1905

It will have a Colored Cover
It will cost only Ten Cents

THE NEW YORK AUTOMOBILE SHOW and the PARIS AUTOMOBILE SHOW, both of them the most important automobile expositions ever held, will be reviewed. Striking pictures never before published will illustrate the principal models.

A NEW TYPE OF AMERICAN AUTOMOBILE will be one of the leading features. Improvement in tires, etc.


STRIKING MODELS of 1905 TOURING-CARS will be illustrated and described.

NOVEL TYPES of AUTOMOBILES will be pictured for the interest of the general reader.

In a division on Automobile Novelties, the automobilist will find instructive accounts of useful automobile accessories.

The pictures published, for the most part, have been prepared especially for this number and have been taken for the purpose of clearly showing the technical features of the carriages. Each article is based upon a careful study of the particular machine described.

MUNN & CO., Publishers Scientific American, 361 Broadway, New York




Buckboard, Price \$375

The Orient Buckboard

What's the use considering a motorcycle when you can have one of these real motor cars for \$375. The Orient Buckboard is light and fast, and so simple a child can run it. It makes light of the steepest grades and will run away from two-thirds of the touring cars. Write for our catalogue, superbly illustrated in colors. Shows eight Orient cars with complete specifications.

WALTHAM MFG. CO. - Waltham, Mass.
Members of Association of Licensed Automobile Manufacturers




CHARTER

GAS and GASOLINE
For All Work.
Stationaries, Portables, Hoisters, Pump
ers, Sawing and Boat Outfits.
Send for Catalogue and Testimonials
State Your Power Needs.

CHARTER GAS ENGINE CO., Box 148, STERLING, ILL.

What Is Daus' Tip-Top?



TO PROVE that Daus' "Tip-Top" is the best and simplest device for making 100 copies from pen-written and 50 copies from typewritten original, we will ship complete duplicator, cap size, without deposit, on ten (10) days' trial.
Price \$7.50 less 5% Net \$5.00
83% per cent. or

The Felix A. B. Daus Duplicator Co., Daus Bldg., 111 John St., New York

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Saws, Sewing Machines, Bicycles, Tools, etc. Save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill.



Microscopes
Our Microscopes, Microtomes, Laboratory Glassware, Chemical Apparatus, Chemicals, Photo Lenses and Shutters, Field Glasses, Projection Apparatus, Photo-Micro Cameras are used by the leading Laboratories and Government Departments Round the World.
Catalogs free.

BAUSCH & LOMB OPT. CO.
ROCHESTER, N. Y.

GREAT BURNHAM STEAM PUMP
for Feeding Boiler, Tank, Beer, Water, Oil, Milk, Whiskey, Condensations, Hydraulic Pressure, Deep Well, Mine, etc. Will not Short Stroke or Injure from Load to No Load. Write for Catalog No. 15.
UNION STEAM PUMP CO., Battle Creek, Mich.

MOVING PICTURE MACHINES
Films, Stereopticons, Views.
If you contemplate going into the public entertainment business, write for catalogue No. 9, which gives detailed information and prices of Moving Picture Machines, Films, Stereopticons and Views. We offer dependable apparatus and views only, no second-hand goods for sale. Responsible parties using our machines can rent moving picture films for one night's use.
KLEINE OPTICAL CO.
52 State Street, Chicago, Ill.

NATIONAL MODEL C GASOLINE
Four Cylinder, Bevel Gear Drive, Double Ball Bearings, Pressed Steel Frame, Side Entrances, Finish and Trimmings the Finest. January Deliveries.
Our full line of Gasoline and Electric cars will be on exhibition at the New York and Chicago Automobile Shows.
WRITE FOR ADVANCE CIRCULARS

NATIONAL MOTOR VEHICLE CO.
1019 East 22d St., Indianapolis, Ind.

GARDNER'S STOCK
C. H. BESLEY & CO. CHICAGO, ILL.
15 to 21 Clinton Street.

1905 ANNOUNCEMENT

The Autocar

A New Type

We believe that the Autocar in all its types represents the highest excellence in automobile design, workmanship and material. Every Autocar is built on honor. We feel, therefore, that our new type will meet with a cordial reception.

This car, Type XI, larger and more powerful than the other types, has a four-cylinder, vertical engine of 16-20 horse-power. The body is built on the newest and most approved French lines. The front seat is divided and both front and rear seats are large and comfortable.

While this car is built upon the tried Autocar principles which have been so splendidly proven, it shows a number of very important improvements making for increased simplicity, ease of operation, safety and comfort.

In fact, though Autocars have always been noted for absence of bewildering intricacy of mechanism, yet no one can but be impressed with the extreme simplicity of this new car. It is a triumph in scientific construction and arrangement.

This car has more than met our highest expectations in the road test. In fact, its performance has been a surprise to experienced automobile men. The power of the car carries it, fully equipped and loaded with five passengers, up tested 12 per cent. grades for instance, at 20 to 25 miles per hour on the direct drive, while on the level the car attains a speed of 40 to 45 miles. The car is a superior climber on any hill.

Altogether our eight years' experience has enabled us to produce in this type a four-cylinder car we are assured cannot be surpassed by any similar car at any price.

The Price of Type XI. is \$2,000. Ready for delivery January 16.

Type VIII.—Four-Passenger Car at \$1,400 and Type X. Runabout at \$900

have made Autocar Reputation. Each stands at the head of its class for value and efficiency.

Autocars, Types VIII., X. and XI. will be on exhibition at the New York Automobile Show, Madison Square Garden.

Catalogue descriptive of the 1904-05 types will be sent free upon request.

This catalogue contains also addresses of our dealers throughout the country who will be glad to give demonstrations to prospective automobile purchasers and explain in detail the merits of our cars.

THE AUTOCAR COMPANY, Ardmore, Pa.
Member Association of Licensed Automobile Manufacturers

2d Military Information Division
Chief of Staff, 105
War Dept.

THE BEST LIGHT
Spectacles and Eyeglasses
are a superfluity where our lamps are used.
Portable, 100-candle power and produces a safe, white, powerful, steady light with
No odor, dirt, grease or smoke.
Every lamp warranted. Costs 2c per week.
AGENTS WANTED EVERYWHERE.
The BEST LIGHT CO.
Owners of Original Patents.
87 E. 5th St., Canton, O.

Bubier's Popular Electrician
3 MONTHS 10c.
Scientific but not technical.
Edited by expert electricians.
50c. per year Dept. S, Lynn, Mass. 3 years \$1

THE MIETZ & WEISS KEROSENE and GAS ENGINE
burns KEROSENE cheaper and safer than gasoline. Automatic, simple, reliable. No electric battery or flame used. Perfect regulation. Belted or directly coupled to dynamo for electric lighting, charging storage batteries, pumping and all power purposes.
A. MIETZ,
129-131 3rd St., New York.
ADAPTED BY
U. S. GOVERNMENT.
Highest Award, direct coupled Generator Set, Paris Exposition, 1900.
Gold Medal, Pan American Exposition, 1902.
Gold Medal and Special Diploma has been awarded to the Mietz & Weiss Oil Engine at the Louisiana Purchase Exposition at St. Louis, 1904.

DYNAMO CASTINGS
Parts of the Franklin Dynamo with output of 5 amperes and 10 volts, furnished for amateurs to put together. Will drive small lamp or light six 6 candle lamps. Rough castings, \$3.50; partly machined, \$6.00; fully machined, ready to assemble, \$8.50. Full directions. Send for booklet No. 9.
PARSELL & WEED, 129-131 W. 31st St., New York

Electrical Engineering
and Experimental Work of Every Description
We have every facility for producing first-class work promptly. Our factory is equipped with modern machinery throughout.
C. F. SPLITDORF
Engineering Dept. 17-27 Vandewater St., N. Y. City


OUR NEW SKELETON WATCH
New England
WATCHES
READY FOR DELIVERY OCTOBER 1st
The man who owns or drives an Auto should not use an expensive watch. The New England screw cased watches are perfection for Motor work. Dust and wet proof. Accuracy guaranteed.
THE NEW ENGLAND WATCH CO., 37 & 39 Maiden Lane, New York
63 Victoria Street, Liverpool, England

Photographic illustrations for illustrating lectures on every subject, professional and popular.
SLIDES
WILLIAM H. RAU, 1322 Chestnut Street PHILADELPHIA, PA.

Commercial Vehicles
TRUCKS
2,000 to 10,000 lbs. Carrying Capacity
Prices and Blue Prints submitted upon application
DELIVERY WAGONS
500 to 1,500 lbs. Carrying Capacity
Special bodies to meet requirements
POPE MOTOR CAR CO. Waverley Department Indianapolis, Ind., U. S. A.

COLD GALVANIZING. AMERICAN PROCESS. NO ROYALTIES. SAMPLES AND INFORMATION ON APPLICATION.

NICKEL
AND
Electro-Plating Apparatus and Material.
THE
Hanson & Van Winkle Co.,
Newark, N. J.,
32 William St., N. Y.
30 & 32 S. Canal St. Chicago.

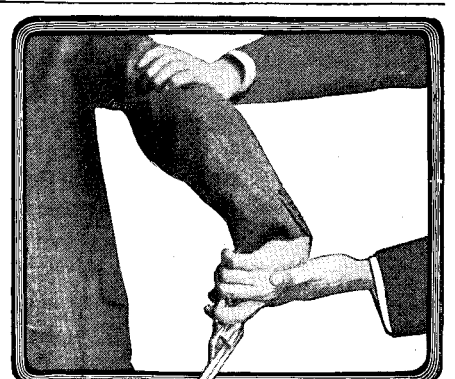

You Needn't Fear a Gun If You Know Jiu-Jitsu


Jiu-Jitsu is the most perfect system of self-defense in the world to day. It is as potent at short range as the most deadly weapon. With a knowledge of its principles you can defend yourself unarmed against every form of vicious attack, and render helpless an assailant with astonishing ease and rapidity. Jiu-Jitsu is different from all other systems because size and strength count for naught. A child of fourteen versed in the art can quickly paralyze the strongest man.

FREE LESSON IN JIU-JITSU

For over 2,000 years an Imperial edict forbade the teaching of Jiu-Jitsu outside of Japan. But as a result of the friendly feeling existing between Japan and the United States, Mr. Y. K. Yabe, formerly of the Ten-Shin Ryu School—the leading school of Jiu-Jitsu in Japan—has been delegated to reveal to Americans all the closely guarded secrets of this ancient art.

He has just written an intensely interesting book fully explaining the principles of Jiu-Jitsu. This book, together with the first lesson in the art, will be sent free to interested persons. This lesson contains full-page illustrations showing one of the most effective methods known to Jiu-Jitsu, for disposing of a dangerous antagonist. If you desire to know more about the closely guarded secrets of this marvelous science, you should write to-day for this free book and specimen lesson. They will be sent you by return mail, post-paid. Address,

The Yabe School of Jiu-Jitsu
344 D, Realty Building
Rochester
New York

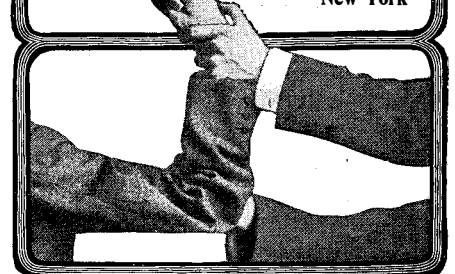

We have never been asked to take an engine back.

JAGER MARINE ENGINES

are of 4 cycle type; speed control approached by no other make; run smoothly and reliably at speeds varying from 100 to 700 revolutions per minute.
STANDARD SIZES:
1 Cylinder, 3 h. p. 5 h. p. 3 Cylinder, 10 h. p. 15 h. p.
2 Cylinder, 7 h. p. 10 h. p. 4 Cylinder, 14 h. p. 20 h. p.
Orders are now being taken for spring delivery. Order early and avoid delay.
CHAS. J. JAGER CO., 166-S High St., Boston, Mass.

Everything for the Automobile

Auto Fur Coats, - - \$20.00 up
Auto Rubber Coats, - - 6.00 up
Auto Cravanette Clothing.
Yankee Spark Plugs, - - 2.00
Yankee Electrical Cut-Out Switches, - - - - - 1.50
Big Free Catalog

E. J. WILLIS CO., 2 Park Place, N. Y.

JESSOP STEEL CO.
MFRS OF CRUCIBLE SHEET STEEL
WASHINGTON, PA.